

快速接头


C-KQ系列



规格


允许的流体	空气/水
基本材料	铜
最大使用压力	1.0MPa
真空压力	-100KPa
耐压	3.0MPa
环境及流体温度	空气:-5~60℃, 水:0~40℃
适用管子材料	尼龙管、聚氨酯管
插管尺寸	Ø4,Ø6,Ø8,Ø10,Ø12,Ø16

型号表示方法

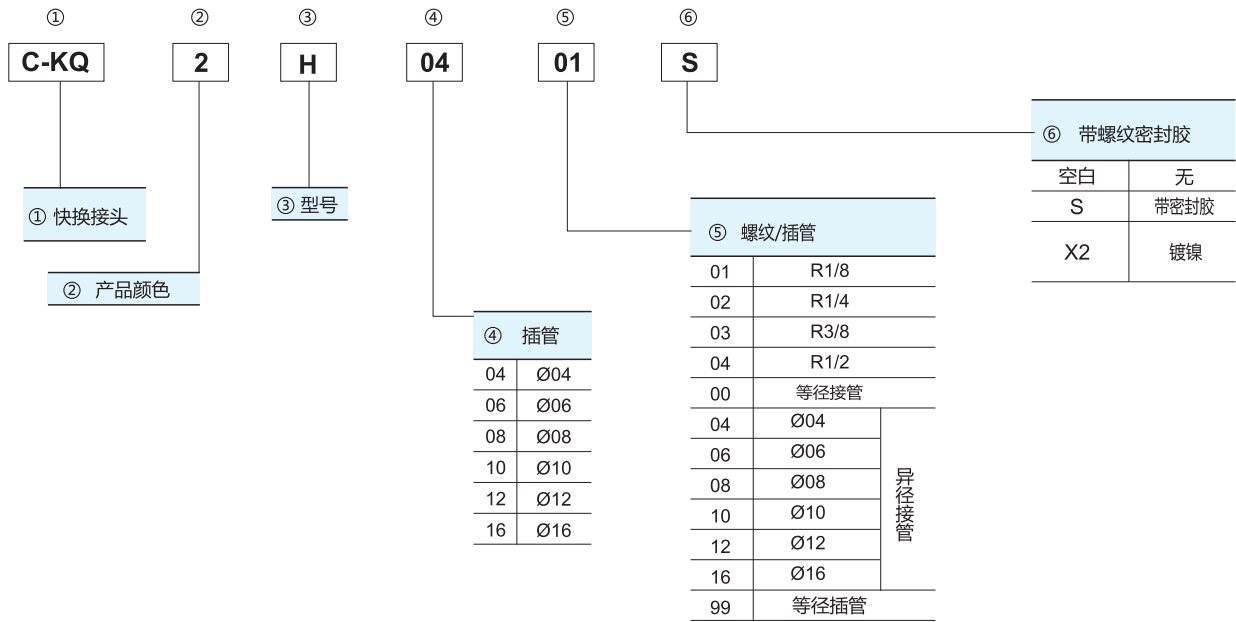


结构说明

①	密封垫	NBR
②	制动抓	不锈钢
③	金属导向	不锈钢或铜
④	释放环	POM
⑤	管子	尼龙管或聚氨酯管
⑥	树脂壳体	PBT
⑦	O型环	NBR
⑧	金属壳体	铜
⑨	螺纹	M/R/Rc

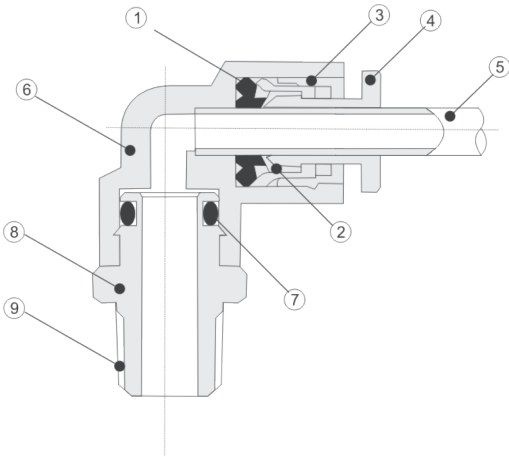


快速接头 C-KQ系列

C-KQ2H 外螺直接头

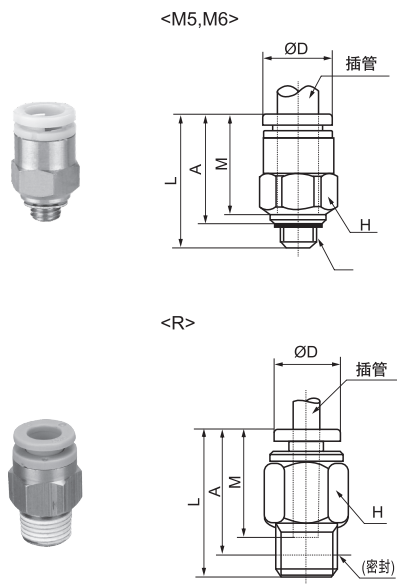


插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD	L	A	M	有效面积 (mm²)		重量 (g)
								尼龙	聚氨酯	
Ø4	C-KQ2H04-01S	1/8	10	—	22	18	16	5.6	4	9
	C-KQ2H04-02S	1/4	14	—	19.5	13.5	16			16
Ø6	C-KQ2H06-01S	1/8	12	—	22.5	18.5	17	13.1	10.4	16
	C-KQ2H06-02S	1/4	14	—	23	17				14
	C-KQ2H06-03S	3/8	17	—	22	15.5				27
Ø8	C-KQ2H08-01S	1/8	14	—	28	24	18.5	26.1	18.0	21
	C-KQ2H08-02S	1/4			26.5	20.5				19
	C-KQ2H08-03S	3/8			22	15.5				26
Ø10	C-KQ2H10-01S	1/8	17	—	30	26	21	26.1	26.1	19
	C-KQ2H10-02S	1/4			33.5	27.5				30
	C-KQ2H10-03S	3/8			29	22.5		41.5	29.5	30
	C-KQ2H10-04S	1/2			27	19				53
Ø12	C-KQ2H12-02S	1/4	19	—	34.5	28.5	22	58.3	46.1	42
	C-KQ2H12-03S	3/8			30	23.5				34
	C-KQ2H12-04S	1/2			22	22				51
Ø16	C-KQ2H16-03S	3/8	24	25.7	39.5	33	25	81	(81)	61
	C-KQ2H16-04S	1/2			35.5	27.5		113	(96)	47

C-KQ2S 内六角直接头

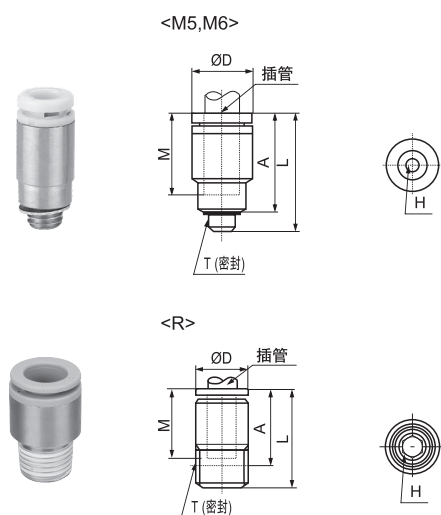

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD	L	A	M	有效面积 (mm²)		重量 (g)
								尼龙	聚氨酯	
Ø4	C-KQ2S04-01S	1/8	3	9.8	23	19	16	4.1	3.6	8
Ø6	C-KQ2S06-01S	1/8	4	11.8	24	20	17	10.0	9.9	9
	C-KQ2S06-02S	1/4		13.8	24	18		10.7	10.0	15
Ø8	C-KQ2S08-01S	1/8	5	14	28	24	18.5	17.2	16.2	12
	C-KQ2S08-02S	1/4	6	25.5	19.5	21		23.3		11
	C-KQ2S08-03S	3/8		17	27.5	21				24
Ø10	C-KQ2S10-01S	1/8	5	17	30	26	21	17.2	16.2	18
	C-KQ2S10-02S	1/4	8	27.5	21.5	21		39.0		12
	C-KQ2S10-03S	3/8		22	27.5	21		26.6		19
	C-KQ2S10-04S	1/2		22	28	20				35
Ø12	C-KQ2S12-02S	1/4	8	19	33.5	27.5	22	46.0	44.5	23
	C-KQ2S13-03S	3/8	10	29	22.5	22		60.0		18
	C-KQ2S12-04S	1/2		22	28	20				30
Ø16	C-KQ2S16-03S	3/8	10	25.7	39	32.5	25	81	(81)	42
	C-KQ2S16-04S	1/2	12	35	27	27		113	(96)	34


C-KQ2F 内螺直接头

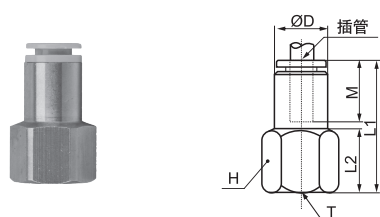

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD	L1	L2	M	有效面积 (mm²)		重量 (g)
								尼龙	聚氨酯	
Ø4	C-KQ2F04-01	1/8	14	10	27	11	16	5.6	4	15
	C-KQ2F04-02	1/4	17		31	14				23
Ø6	C-KQ2F06-01	1/8	14	12	27.5	11	17	13.1	10.4	15
	C-KQ2F06-02	1/4	17		31	13				22
	C-KQ2F06-03	3/8	19		33.5	15				25
Ø8	C-KQ2F08-01	1/8	14	14	29	11	18.5	26.1	18.0	17
	C-KQ2F08-02	1/4	17		32.5	13				24
	C-KQ2F08-03	3/8	19		33.5	14				24
Ø10	C-KQ2F10-02	1/4	17	17	34.5	14	21	41.5	29.5	27
	C-KQ2F10-03	3/8	19		36.5	15				30
Ø12	C-KQ2F12-02	1/4	19	19	35	14	22	58.3	46.1	36
	C-KQ2F12-03	3/8			37	14				31
	C-KQ2F12-04	1/2			41	18				52
Ø16	C-KQ2F16-03	3/8	24	25.7	38	15	25	81	(81)	59
	C-KQ2F16-04	1/2			43	19		113	(96)	58


C-KQ系列 快速接头

C-KQ2H 直接管




插管 (mm)		型号	ØD	L	M		有效面积 (mm²)		重量 (g)
①	②				1	2	尼龙	聚氨酯	
Ø4		C-KQ2H04-00	10.4	32.5	16		5.6	4	3
Ø6		C-KQ2H06-00	12.8	34.5	17		13.1	10.4	4
Ø8		C-KQ2H08-00	15.2	38.5	18.5		26.1	18.0	6
Ø10		C-KQ2H10-00	18.5	42.5	21		41.5	29.5	11
Ø12		C-KQ2H12-00	20.9	44.5	22		58.3	46.1	14
Ø16		C-KQ2H16-00	26.5	51	25		113	(96)	24
Ø4	Ø6	C-KQ2H04-06	12.8	34.5	16	17	5.6	5.6	5
Ø6	Ø8	C-KQ2H06-08	15.2	38.5	17	18.5	13.1	10.4	6
Ø8	Ø10	C-KQ2H08-10	18.5	42	18.5	21	26.1	18.0	11
Ø10	Ø12	C-KQ2H10-12	20.9	44.5	21	22	41.5	29.5	14
Ø12	Ø16	C-KQ2H12-16	26.5	56.5	22	25	58.3	46.1	47

C-KQ2L 外螺弯接头

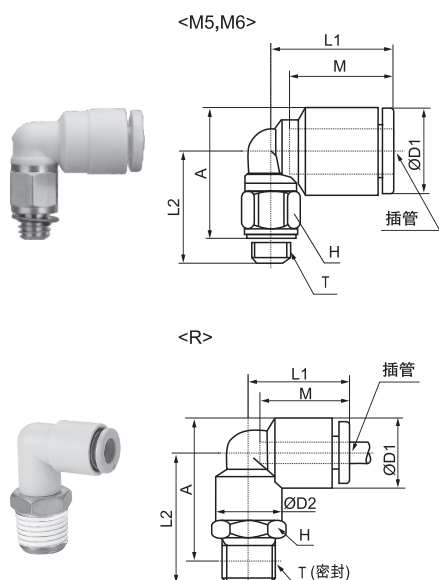

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	A	M	有效面积 (mm²)		重量 (g)
										尼龙	聚氨酯	
Ø4	C-KQ2L04-01S	1/8	10	10.4	10	18	22	23	16	4.2	4.2	10
	C-KQ2L04-02S	1/4	14				26	25				19
Ø6	C-KQ2L06-01S	1/8	10	12.8	10	20	23	25.5	17	11.4	9.0	12
	C-KQ2L06-02S	1/4	14				27	27.5				22
	C-KQ2L06-03S	3/8	17				29	29				33
Ø8	C-KQ2L08-01S	1/8	12	15.2	12	23	24.5	28	18.5	21.6	14.9	13
	C-KQ2L08-02S	1/4	14				28.5	30				21
	C-KQ2L08-03S	3/8	17				30.5	31.5				35
Ø10	C-KQ2L10-01S	1/8	17	18.5	17	26.5	27	32	21	21.6	14.9	25
	C-KQ2L10-02S	1/4					30	33				26
	C-KQ2L10-03S	3/8					32	34.5		35.2	25.0	36
	C-KQ2L10-04S	1/2					36	37				63
Ø12	C-KQ2L12-02S	1/4	17	20.9	17	28.5	31	35.5	22	50.2	39.7	28
	C-KQ2L12-03S	3/8					33	37				38
	C-KQ2L12-04S	1/2					37	39.5				65
Ø16	C-KQ2L16-03S	3/8	22	26.5	20.9	34	38	44.5	25	71	(71)	101
	C-KQ2L16-04S	1/2					41	46				105


C-KQ2LU 偏三通外螺接头

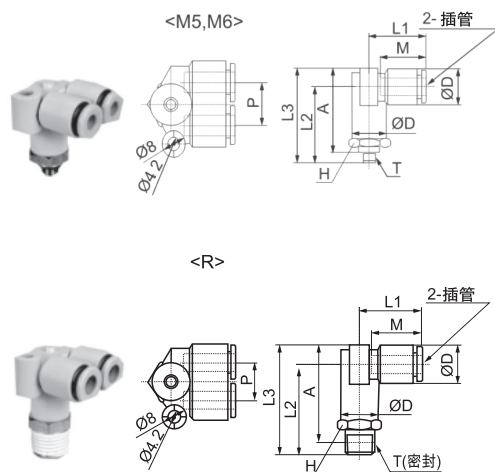

插管 (mm)	型 号	连接螺纹 T	H 六角对边	ØD	L1	L2	L3	A	M	P	有效面积 (mm²)		重量 (g)
											尼龙	聚氨酯	
Ø4	C-KQ2LU04-M5	M5×0.8	11	10.4	18.5	24	29.5	25.5	16	10.4	4.3	4.1	10
	C-KQ2LU04-M6	M6×1.0				24.5	30				27.5	6.0	4.1
	C-KQ2LU04-01S	1/8	26.5			32	30	21					
	C-KQ2LU04-02S	1/4	30.5			36	30						
Ø6	C-KQ2LU06-M5	M5×0.8	13	12.8	21	26.5	33	29.5	17	12.8	4.3	4.3	13
	C-KQ2LU06-M6	M6×1.0				27	33.5				32	13.9	11.0
	C-KQ2LU06-01S	1/8	29.5			36	32	22					
	C-KQ2LU06-02S	1/4	33			39.5	33.5	35					
	C-KQ2LU06-03S	3/8	17			35	41.5	35					
Ø8	C-KQ2LU08-01S	1/8	17	15.2	24	34	41.5	38	18.5	15.2	26.3	18.2	27
	C-KQ2LU08-02S	1/4				37	44.5	38.5					35
	C-KQ2LU08-03S	3/8				38	45.5	39					
Ø10	C-KQ2LU10-02S	1/4	19	18.5	27	40	49.5	43.5	21	18.5	40.8	29.0	41
	C-KQ2LU10-03S	3/8				41	50.5	44					42
	C-KQ2LU10-04S	1/2				22	44.5	54					45.5
Ø12	C-KQ2LU12-02S	1/4	22	20.9	29	42.5	53	47	22	20.9	57.2	45.2	57
	C-KQ2LU12-03S	3/8				43.5	54	47.5					58
	C-KQ2LU12-04S	1/2				46.5	57	49					65


快速接头 C-KQ系列

C-KQ2V 单头外螺六角接头

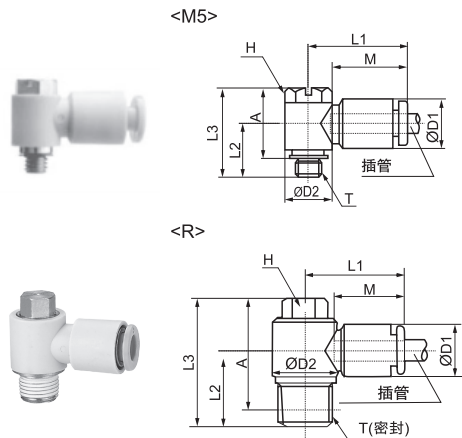


插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	有效面积 (mm²)		重量 (g)
											尼龙	聚氨酯	
Ø4	C-KQ2V04-M5	M5×0.8	8	10.4	9.8	20.5	11	18.5	15	16	2.9	2.9	6
	C-KQ2V04-01S	1/8			13.4	22	14.5	26.5	22.5		2.9	2.9	14
Ø6	C-LQ2V06-M5	M5×0.8	8	12.8	9.8	23.5	12	18.5	15	17	3.8	3.8	7
	C-KQ2V06-01S	1/8			13.4	24	14.5	26.5	22.5		7.5	5.9	15
	C-KQ2V06-02S	1/4	10		15.4	23.5	18.5	31	25	18.5	16	11.2	24
Ø8	C-KQ2V08-01S	1/8	12	15.2	17.6	28.5	15.5	28.5	24.5		20.5	14.3	30
	C-KQ2V08-03S	3/8	14		20.6	27.5	20.5	36.5	30		20.5	14.3	47
Ø10	C-KQ2V10-02S	1/4	14	18.5	20.6	31	19.5	35.5	29.5	21	27	20.3	40
	C-KQ2V10-03S	3/8					20.5	36.5	30		27	20.3	49
Ø12	C-KQ2V12-03S	3/8	17	20.9	25.2	34	22	38.5	32	22	39	30.8	63
	C-KQ2V12-04S	1/2					25	41.5	33.5		39	30.8	80

C-KQ2VS 单头外螺内六角接头

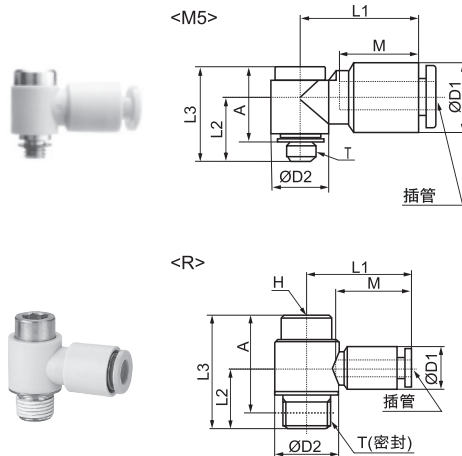

插管 (mm)	型 号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	有效面积 (mm²)		重量 (g)
											尼龙	聚氨酯	
Ø4	C-KQ2VS04-M5	M5	4	10.4	9.8	20.5	10.5	18	15	16	2.9	2.9	6
	C-KQ2VS04-01S	1/8	6		13.4	22	14.5	26.5	22.5		2.9	2.9	14
Ø6	C-KQ2VS06-M5	M5	4	12.8	9.8	23.5	12	18	15	17	3.8	3.8	7
	C-KQ2VS06-01S	1/8	6		13.4	24	14.5	26.5	22.5		7.5	5.9	15
	C-KQ2VS06-02S	1/4			15.3	23.5	18.5	27	21		22		
Ø8	C-KQ2VS08-01S	1/8	8	15.2	17.6	28.5	15.5	27	23	18.5	16	11.2	24
	C-KQ2VS08-02S	1/4			18.5	30	24	30					
	C-KQ2VS08-03S	3/8			20.6	27.5	20.5	32.5	26		20.5	14.3	47
Ø10	C-KQ2VS10-02S	1/4	8	18.5	20.6	31	19.5	31.5	25	21	27	20.3	32
	C-KQ2VS10-03S	3/8					20.5	32.5	26		39		
Ø12	C-KQ2VS12-03S	3/8	10	20.9	25.2	34	22	36	30	22	39	30.8	48
	C-KQ2VS12-04S	1/2					25	39	31		67		


C-KQ2E 隔板内螺接头

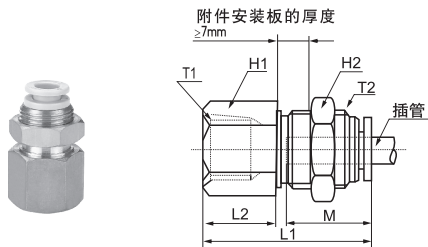

插管 (mm)	型号	连接螺纹 T1	安装螺纹 T2	H1 六角对边	H2 六角对边	L1	L2	安装孔	M	有效面积 (mm²)		重量 (g)
										尼龙	聚氨酯	
Ø4	C-KQ2E04-01	1/8	M12×1	14	14	27.5	11	13	16	5.6	4	16
	C-KQ2E04-02	1/4		17		31	15			5.6	4	35
Ø6	C-KQ2E06-01	1/8	M14×1	17	17	28	11	15	17	13.1	10.4	25
	C-KQ2E06-02	1/4		19		31.5	15			13.1	10.4	40
	C-KQ2E06-03	3/8	M16×1	19	19	33.5	17	17	18.5	26.1	18.0	29
Ø8	C-KQ2E08-01	1/8		17		27.5	7.5	13	17	26.1	18.0	28
	C-KQ2E08-02	1/4	M20×1	19	24	33	13			26.1	18.0	27
Ø10	C-KQ2E10-02	3/8		19		35	15	21	21	41.5	29.5	48
	C-KQ2E10-03	1/2	M22×1	22	27	34.5	12.5	23	22	41.5	29.5	53
Ø12	C-KQ2E12-03	3/8		22		36.5	15	29	25	58.3	46.1	67
	C-KQ2E12-04	1/2	M28×1.5	24	32	37	14			58.3	46.1	92
Ø16	C-KQ2E16-03	3/8		30		41	18	40	40	96	(96)	59
	C-KQ2E16-04	1/2		32		44	18			96	(96)	127


C-KQ系列 快速接头

C-KQ2VF 单头内外螺接头

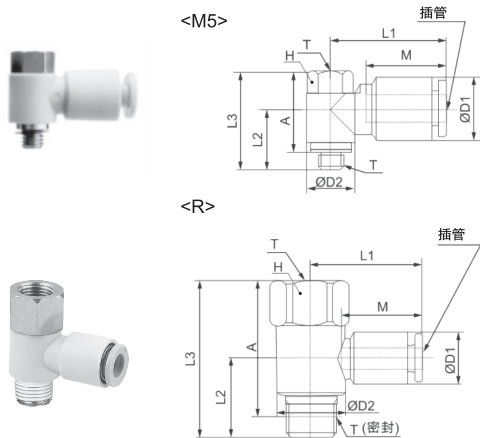


插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	重量 (g)
Ø4	C-KQ2VF04-M5	M5×0.8	8	10.4	9.8	20.5	11	20	16	16	6
	C-KQ2VF04-01S	1/8	14		13.4	22	15.5	29.5	25.5		19
Ø6	C-KQ2VF06-M5	M5×0.8	8	12.8	9.8	23.5	12.5	20	16	17	7
	C-KQ2VF06-01S	1/8	14		13.4	24.5	15.5	29.5	25.5		19
	C-KQ2VF06-02S	1/4	17		17.6	25	20	38.5	32.5		36
Ø8	C-KQ2VF08-01S	1/8	17	15.2	17.6	28.5	17	31	27	18.5	29
	C-KQ2VF08-02S	1/4					20	38.5	32.5		37
	C-KQ2VF08-03S	3/8	22		25.2	29.5	25.5	45.5	39		66
Ø10	C-KQ2VF10-02S	1/4	19	18.5	20.6	31.5	22	41	35	21	48
	C-KQ2VF10-03S	3/8	22				24.5	45.5	39		68
Ø12	C-KQ2VF12-03S	3/8	22	20.9	25.2	34	24.5	45.5	39	22	70

C-KQ2LF 内螺弯接头

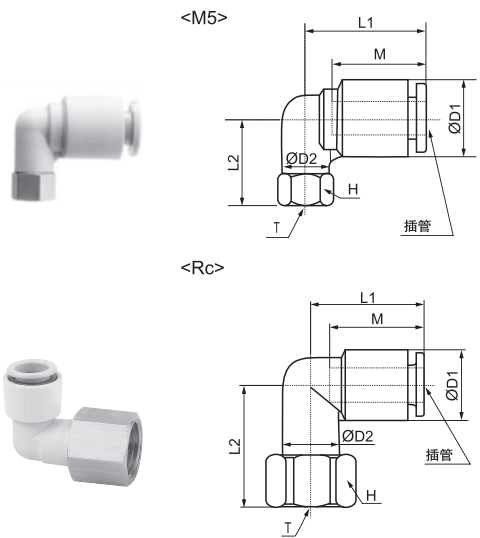

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	M	有效面积 (mm²)		重量 (g)
									尼龙	聚氨酯	
Ø4	C-KQ2LF04-M5	M5×0.8	8	10.4	8	18.5	14.5	16	3.5	3.5	5
	C-KQ2LF04-M6	M6×1.0			15.5						
	C-KQ2LF04-01	1/8	14		21		4.2		4.2	13	
	C-KQ2LF04-02	1/4	17		24.5					20	
Ø6	C-KQ2LF06-M5	M5×0.8	8	12.8	8	20.5	15	17	3.5	3.5	5
	C-KQ2LF06-M6	M6×1.0			16					6	
	C-KQ2LF06-01	1/8	14		22		11.4		9.0	13	
	C-KQ2LF06-02	1/4	17		25.5					20	
	C-KQ2LF06-03	3/8	19		26						
Ø8	C-KQ2LF08-01	1/8	14	15.2	12	23.5	23	18.5	21.6	14.9	16
	C-KQ2LF08-02	1/4	17		26.5		22				
	C-KQ2LF08-03	3/8	19		27		23				
Ø10	C-KQ2LF10-02	1/4	17	18.5	17	26.5	28	21	21.6	14.9	27
	C-KQ2LF10-03	3/8	19		28.5		35.2		25.0	46	
	C-KQ2LF10-04	1/2	24		32.5						
Ø12	C-KQ2LF12-02	1/4	17	20.9	17	28.5	29.5	22	50.2	39.7	29
	C-KQ2LF12-03	3/8	19		30		48				
	C-KQ2LF12-04	1/2	24		34						


C-KQ2VD 单头2组接头

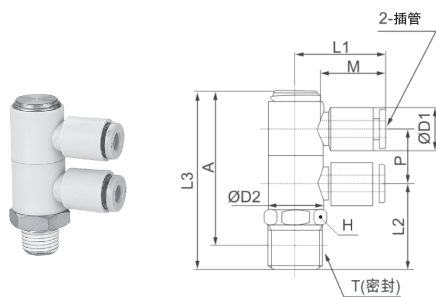

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	P	重量 (g)
Ø4	C-KQ2VD04-01S	1/8	14	10.4	13.4	22	18.5	41	37	16	13.4	23
	C-KQ2VD04-02S	1/4					21.5	44	38			29
	C-KQ2VD04-03S	3/8					23.5	46	40			42
Ø6	C-KQ2VD06-01S	1/8	14	12.8	13.4	24.5	18.5	41	37	17	13.4	24
	C-KQ2VD06-02S	1/4					21.5	44	38			30
	C-KQ2VD06-03S	3/8					23.5	46	40			42
Ø8	C-KQ2VD08-01S	1/8	19	15.2	17.6	28.5	21	48	44	18.5	15.9	53
	C-KQ2VD08-02S	1/4					24	51	45			51
	C-KQ2VD08-03S	3/8					25	52	45.5			60
	C-KQ2VD08-04S	1/2					28.5	55.5	47.5			82
Ø10	C-KQ2VD10-02S	1/4	21	18.5	20.6	31.5	26.5	58	52	21	19.2	71
	C-KQ2VD10-03S	3/8					27.5	59	53			74
	C-KQ2VD10-04S	1/2					30.5	62	54			91
Ø12	C-KQ2VD12-02S	1/4	26	20.9	25.2	34	28.5	64.5	58.5	21	21.6	118
	C-KQ2VD12-03S	3/8					29.5	65.5	59			113
	C-KQ2VD12-04S	1/2					32.5	68.5	60			125


快速接头 C-KQ系列

C-KQ2VT 单头3组接头

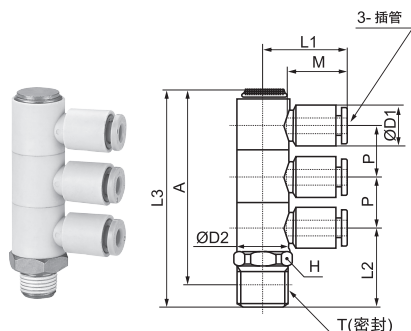


插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	P	重量 (g)
Ø4	C-KQ2VT04-01S	1/8	14	10.4	13.4	22	18.5	54.5	50.5	16	13.4	29
	C-KQ2VT04-02S	1/4	21.5				57.5	51.5	34			
	C-KQ2VT04-03S	3/8	23.5				59.5	53.5	48			
Ø6	C-KQ2VT06-01S	1/8	14	12.8	13.4	24.5	18.5	54.5	50.5	17	13.4	31
	C-KQ2VT06-02S	1/4	21.5				57.5	51.5	37			
	C-KQ2VT06-03S	3/8	23.5				59.5	53.5	50			
Ø8	C-KQ2VT08-01S	1/8	19	15.2	17.6	28.5	21	64	60	18.5	15.9	71
	C-KQ2VT08-02S	1/4					24	67	61			66
	C-KQ2VT08-03S	3/8					25	68	61.5			75
	C-KQ2VT08-04S	1/2	21				28.5	71.5	63.5			96
Ø10	C-KQ2VT10-02S	1/4	21	18.5	20.6	31.5	26.5	77.5	71.5	21	19.2	94
	C-KQ2VT10-03S	3/8					27.5	78.5	72			111
	C-KQ2VT10-04S	1/2					30.5	81.5	73.5			153
Ø12	C-KQ2VT12-02S	1/4	26	20.9	25.2	34	28.5	86	80	21	21.6	143
	C-KQ2VT12-03S	3/8					29.5	87	80.5			143
	C-KQ2VT12-04S	1/2					32.5	90	82			154

C-KQ2Z 双头外螺六角接头

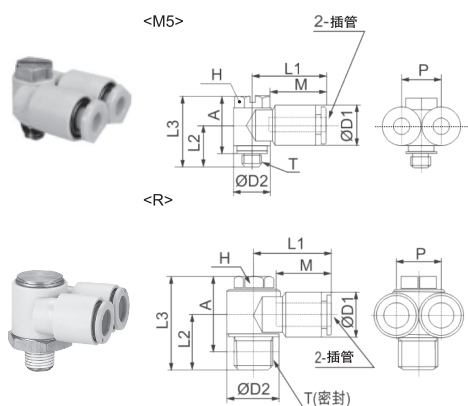

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	P	有效面积 (mm²)		重量 (g)
												尼龙	聚氨酯	
Ø4	C-KQ2Z04-M5	M5×0.8	8	10.4	9.8	19.5	11	18.5	15	16	10.4	3.4	3.4	8
	C-KQ2Z04-01S	1/8			13.4	21	14.5	26.5	22.5			4.7	4.7	16
Ø6	C-ZQ2Z06-01S	1/8	8	12.8	13.4	22	14.5	26.5	22.5	17	12.8	10.8	8.6	17
	C-ZQ2Z06-02S	1/4	20.6		25.5	19.5	35.5	29.5	39					
	C-ZQ2Z06-03S	3/8	14				20.5	36.5	30					47
Ø8	C-KQ2Z08-01S	1/8	12	15.2	17.6	26	15.5	28.5	24.5	18.5	15.2	20.5	14.2	27
	C-KQ2Z08-02S	1/4	18.5				31.5	25.5	33					
	C-KQ2Z08-03S	3/8	14				20.6	27	20.5					36.5
Ø10	C-KQ2Z10-02S	1/4	14	18.5	20.6	29	19.5	35.5	29.5	21	18.5	31.8	22.6	46
	C-KQ2Z10-03S	3/8					20.5	36.5	30					54
Ø12	C-KQ2Z12-02S	3/8	17	20.9	25.2	32.5	22	39	32.5	22	20.9	44.6	35.3	71
	C-KQ2Z12-04S	1/2					25	42	34					88


C-KQ2ZF 双头内外螺接头

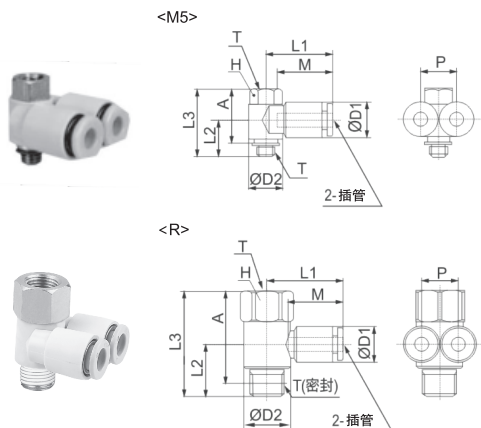

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	P	重量 (g)
Ø4	C-KQ2ZF04-M5	M5×0.8	8	10.4	9.8	19.5	11	20	16.5	16	10.4	8
	C-KQ2ZF04-01S	1/8	14		13.4	21	15.5	29.5	25.5			21
Ø6	C-KQ2ZF06-01S	1/8	14	12.8	13.4	22	15.5	29.5	25.5	17	12.8	21
	C-KQ2ZF06-02S	1/4	19		20.6	25.5	22	41	35			47
Ø8	C-KQ2ZF08-01S	1/8	17	15.2	17.6	25.5	17	31	27	18.5	15.2	32
	C-KQ2ZF08-02S	1/4	19		20.6	27	22	41	35			49
Ø10	C-KQ2ZF10-02S	1/4	19	18.5	20.6	29	22	41	35	21	18.5	54
	C-KQ2ZF10-03S	3/8	22		25.2	31.5	24.5	45.5	39			74
Ø12	C-KQ2ZF12-03S	3/8	22	20.9	25.2	32.5	24.5	45.5	39	22	20.9	77


C-KQ系列 快速接头

C-KQ2ZD 双头2组接头

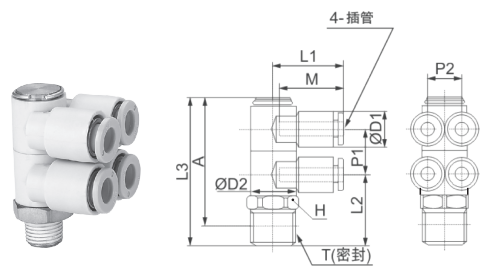


插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	P1	P2	重量 (g)			
Ø4	C-KQ2ZD04-01S	1/8	14	10.4	13.4	21	18.5	41	37	16	13.4	10.4	34			
	C-KQ2ZD04-02S	1/4					21.5	44	38				40			
	C-KQ2ZD04-03S	3/8					23.5	46	40				53			
Ø6	C-KQ2ZD06-01S	1/8	14	12.8	13.4	22	18.5	41	37	17	13.4	12.8	38			
	C-KQ2ZD06-02S	1/4					21.5	44	38				43			
	C-KQ2ZD06-03S	3/8					23.5	46	40				57			
Ø8	C-KQ2ZD08-01S	1/8	19	15.2	17.6	26	21	48	44	18.5	15.9	15.2	76			
	C-KQ2ZD08-02S	1/4					24	51	45				72			
	C-KQ2ZD08-03S	3/8	21				25	52	45.5				81			
	C-KQ2ZD08-04S	1/2					28.5	55.5	47.5				102			
Ø10	C-KQ2ZD10-02S	1/4	21	18.5	20.6	29	26.5	58	52	21	19.2	18.5	111			
	C-KQ2ZD10-03S	3/8					27.5	59	53				128			
	C-KQ2ZD10-04S	1/2					30.5	62	54				178			
Ø12	C-KQ2ZD12-02S	1/4	26	20.9	25.2	32	28.5	64.5	58.5	22	21.6	20.9	167			
	C-KQ2ZD12-03S	3/8					29.5	65.5	59				179			
	C-KQ2ZD12-04S	1/2					32.5	68.5	60							

C-KQ2ZT 双头3组接头

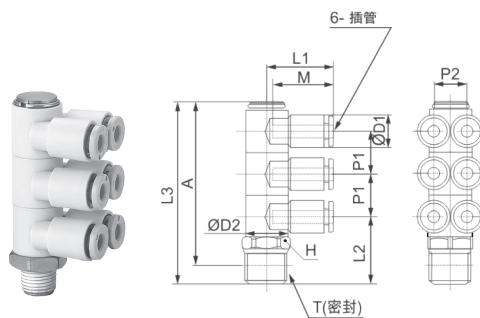

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	L3	A	M	P1	P2	重量 (g)
Ø4	C-KQ2ZT04-01S	1/8	14	10.4	13.4	21	18.5	54.5	50.5	16	13.4	10.4	25
	C-KQ2ZT04-02S	1/4					21.5	57.5	51.5				31
	C-KQ2ZT04-03S	3/8					23.5	59.5	53.5				44
Ø6	C-KQ2ZT06-01S	1/8	14	12.8	13.4	22	18.5	54.5	50.5	17	13.4	12.8	27
	C-KQ2ZT06-02S	1/4					21.5	57.5	51.5				33
	C-KQ2ZT06-03S	3/8					23.5	59.5	53.5				46
Ø8	C-KQ2ZT08-01S	1/8	19	15.2	17.6	26	21	64	60	18.5	15.9	15.2	56
	C-KQ2ZT08-02S	1/4					24	67	61				54
	C-KQ2ZT08-03S	3/8					25	68	61.5				62
	C-KQ2ZT08-04S	1/2	21				28.5	71.5	63.5				85
Ø10	C-KQ2ZT10-02S	1/4	21	18.5	20.6	29	26.5	77.5	71.5	21	19.2	18.5	83
	C-KQ2ZT10-03S	3/8					27.5	78.5	72				85
	C-KQ2ZT10-04S	1/2					30.5	81.5	73.5				102
Ø12	C-KQ2ZT12-02S	1/4	26	20.9	25.2	32	28.5	86	80	22	21.6	20.9	134
	C-KQ2ZT12-03S	3/8					29.5	87	80.5				130
	C-KQ2ZT12-04S	1/2					32.5	90	82				141


C-KQ2L 弯接管

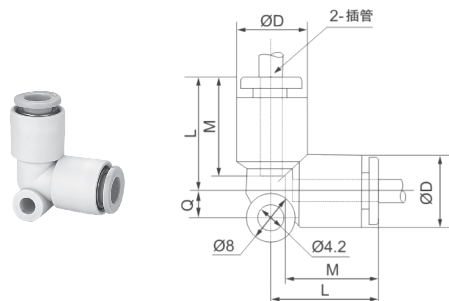

插管 (mm)	型号	ØD	L	Q	M	有效面积 (mm²)		重量 (g)
						尼龙	聚氨酯	
Ø4	C-KQ2L04-00	10.4	18	4.5	16	4.2	4.2	6
Ø6	C-KQ2L06-00	12.8	20	5.3	17	11.4	9.0	6
Ø8	C-KQ2L08-00	15.2	23	6	18.5	21.6	14.9	10
Ø10	C-KQ2L10-00	18.5	26.5	6.8	21	35.2	25.0	17
Ø12	C-KQ2L12-00	20.9	28.5	7.5	22	50.2	39.7	21
Ø16	C-KQ2L16-00	26.5	34	10	25	100	(84)	29


快速接头 C-KQ系列

C-KQ2LU 偏三通接管

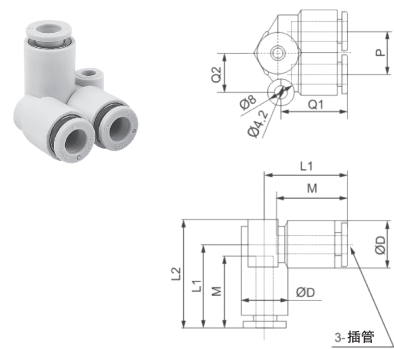


插管 (mm)	型号	ØD	L1	L2	Q1	Q2	M	p	有效面积 (mm²)		重量 (g)
									尼龙	聚氨酯	
Ø4	C-KQ2LU04-00	10.4	18.5	24	18.5	10	16	10.4	6.0	4.1	6
Ø6	C-KQ2LU06-00	12.8	21	27.5	20.5	12	17	12.8	13.9	11.0	8
Ø8	C-KQ2LU08-00	15.2	24	32	24.5	14	18.5	15.2	26.3	18.2	15
Ø10	C-KQ2LU10-00	18.5	27	36.5	28	16	21	18.5	40.8	29.0	25
Ø12	C-KQ2LU12-00	20.9	29	40	30	18	22	20.9	57.2	45.2	32

C-KQ2L 等径弯插管

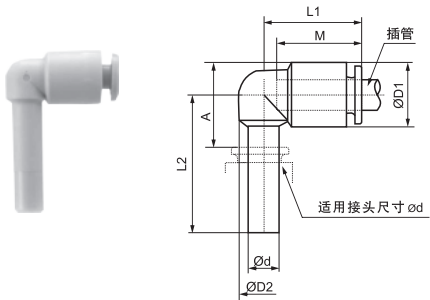


插管 (mm)	适用接头尺寸 Ød	型号	ØD1	ØD2	L1	L2	A	M	有效面积 (mm²)		重量 (g)
									尼龙	聚氨酯	
Ø4	Ø4	C-KQ2L04-99	10.4	8	18	25	14.5	16	4.2	4.2	3
Ø6	Ø6	C-KQ2L06-99	12.8	10	20	27.5	17	17	11.4	9.0	3
Ø8	Ø8	C-KQ2L08-99	15.2	12	22.5	31.5	21	18.5	21.6	14.9	5
Ø10	Ø10	C-KQ2L10-99	18.5	14	25.5	35.5	23.5	21	35.2	25.0	9
Ø12	Ø12	C-KQ2L12-99	20.9	16	27	37.5	26	22	50.2	39.7	10
Ø16	Ø16	C-KQ2L16-99	26.5	20.9	34	53	41	25	100	(84)	42

C-KQ2W 加长等径弯插管

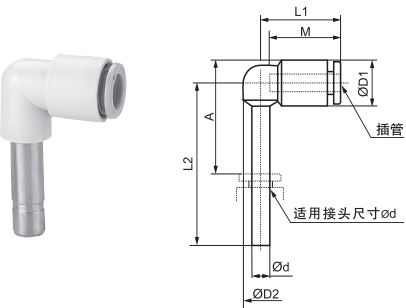

插管 (mm)	适用接头尺寸 Ød	型号	ØD1	ØD2	L1	L2	A	M	有效面积 (mm²)		重量 (g)
									尼龙	聚氨酯	
Ø4	Ø4	C-KQ2W04-99	10.4	10	18.1	32.1	21.5	16	4.2	4.2	13
Ø6	Ø6	C-KQ2W06-99	12.8	10	20	34.5	24	17	11.4	9.0	14
Ø8	Ø8	C-KQ2W08-99	15.2	12	23.1	39.5	29	18.5	21.6	14.9	16
Ø10	Ø10	C-KQ2W10-99	18.5	17	26.6	45.5	33.5	21	35.2	25.0	19
Ø12	Ø12	C-KQ2W12-99	20.9	17	28.6	47.5	36	22	50.2	39.7	23


C-KQ2L 变径弯插管

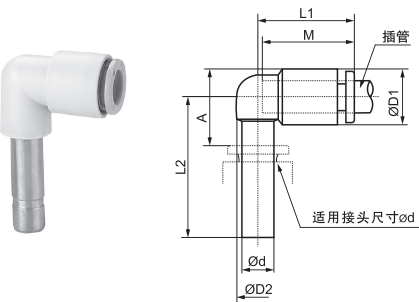

插管 (mm)	适用接头尺寸 Ød	型号	ØD1	ØD2	L1	L2	A	M	有效面积 (mm²)		重量 (g)
									尼龙	聚氨酯	
Ø4	Ø6	C-KQ2L04-06 (99)	10.4	8	18	33	21.5	16	4.2	4.2	13
	Ø8	C-KQ2L04-08 (99)		10		42	29				21
Ø6	Ø8	C-KQ2L06-08 (99)	12.8	10	19.5	37.5	25	17	11.4	9.0	22
	Ø10	C-KQ2L06-10 (99)			20	45.5	31				29
Ø8	Ø10	C-KQ2L08-10 (99)	15.2	12	22.5	41.5	28.5	18.5	21.6	14.9	30
	Ø12	C-KQ2L08-12 (99)			23	48.5	34				37
Ø10	Ø12	C-KQ2L10-12 (99)	18.5	17	26.5	52	39.5	21	35.2	25.0	39
Ø12	Ø16	C-KQ2L12-16 (99)	20.9	17	28.5	59.5	44.5	22	50.2	39.7	63


C-KQ系列 快速接头

C-KQ2W 外螺加长弯接头

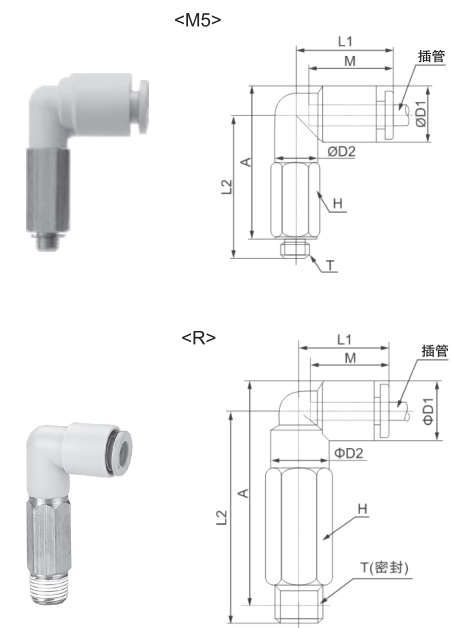

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	A	M	有效面积 (mm²)		重量 (g)
										尼龙	聚氨酯	
Ø4	C-KQ2W04-01S	1/8	10	10.4	10	18	37.5	38.5	16	4.0	4.0	23
	C-KQ2W04-02S	1/4	14				43.5	42.5				38
Ø6	C-KQ2W06-01S	1/8	10	12.8	10	20	40	42.5	17	10.9	8.6	26
	C-KQ2W06-02S	1/4	14				46	46.5				41
	C-KQ2W06-03S	3/8	17				48	48				67
Ø8	C-KQ2W08-01S	1/8	12	15.2	12	23	43.5	47	18.5	20.5	14.2	30
	C-KQ2W08-02S	1/4	14				49.5	51				47
	C-KQ2W08-03S	3/8	17				51.5	52.5				74
Ø10	C-KQ2W10-02S	1/4	17	18.5	17	26.5	58.5	59.5	21	33.5	23.8	66
	C-KQ2W10-03S	3/8					58.5	61				76
	C-KQ2W10-04S	1/2					65	66				145
Ø12	C-KQ2W12-02S	1/4	17	20.9	17	28.5	57.5	62	22	47.7	37.7	68
	C-KQ2W12-03S	3/8					59.5	63.5				78
	C-KQ2W12-04S	1/2					66	68.5				147
Ø16	C-KQ2W16-03S	3/8	22	26.5	20.9	34	69.5	76	25	71	(71)	101
	C-KQ2W16-04S	1/2					75	80		100	(84)	105

C-KQ2T 外螺T型接头

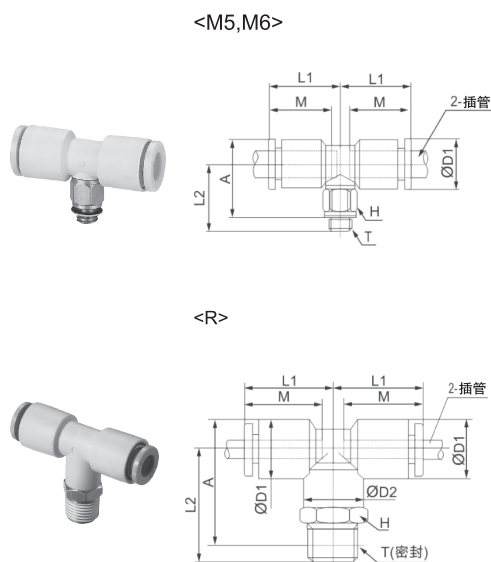


插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L1	L2	A	M	有效面积 (mm²)		重量 (g)
										尼龙	聚氨酯	
Ø3.2	C-KQ2T23-01S	1/8	10	9.6	10	17.5	21.5	22.5	15.5	3.4	2.9	10
	C-KQ2T23-02S	1/4	4				25.5	24.5				20
Ø4	C-KQ2T04-01S	1/8	10	10.4	10	18	22	23	16	6.0	4.1	13
	C-KQ2T04-02S	1/4	14				26	25				19
Ø6	C-KQ2T06-01S	1/8	10	12.8	10	20	23	25.5	17	13.9	11.0	12
	C-KQ2T06-02S	1/4	14				27	27.5				20
	C-KQ2T06-03S	3/8	17				29	29				34
Ø8	C-KQ2T08-01S	1/8	12	15.2	12	23	24.5	28	18.5	26.3	18.2	14
	C-KQ2T08-02S	1/4	14				28.5	30				22
	C-KQ2T08-03S	3/8	17				30.5	31.5				36
Ø10	C-KQ2T10-01S	1/8	17	18.5	17	26.5	27	32	21	40.8	29.0	31
	C-KQ2T10-02S	1/4					30	33				29
	C-KQ2T10-03S	3/8					32	34.5				39
	C-KQ2T10-04S	1/2					36	37				66
Ø12	C-KQ2T12-02S	1/4	17	20.9	17	28.5	31	35.5	22	57.2	45.2	31
	C-KQ2T12-03S	3/8					33	37				41
	C-KQ2T12-04S	1/2					37	39.5				38
Ø16	C-KQ2T16-03S	3/8	22	26.5	20.9	34	38	44.5	25	71	71	112
	C-KQ2T16-04S	1/2					40.5	46		100	100	116

快速接头


C-KQ系列

C-KQ2T三通接管

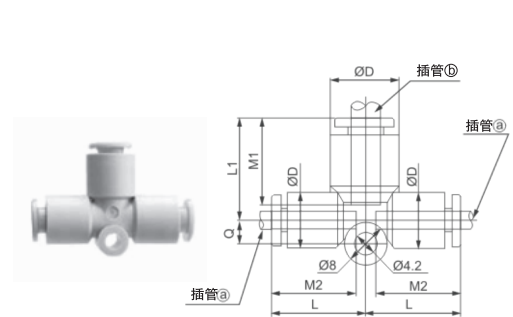


插管 (mm)		型号	ØD	L	Q	M		有效面积 (mm²)		重量 (g)
①	②					1	2	尼龙	聚氨酯	
Ø4		C-KQ2T04-00	10.4	18	4.5	16		6.4	4.4	7
Ø6		C-KQ2T06-00	12.8	20	5.3	17		13.4	10.6	10
Ø8		C-KQ2T08-00	15.2	23	6	18.5		25.6	17.7	15
Ø10		C-KQ2T10-00	18.5	26.5	6.8	21		40	28.4	25
Ø12		C-KQ2T12-00	20.9	28.5	7.5	22		57.4	45.4	29
Ø16		C-KQ2T16-00	26.5	34	10	25		100	(84)	40
Ø4	Ø6	C-KQ2T04-06	12.8	20	4.5	17	16	7.1	6.5	5
Ø6	Ø8	C-KQ2T06-08	15.2	23	5.3	18.5	17	16.4	16.4	8
Ø8	Ø10	C-KQ2T08-10	18.5	26.5	6	21	18.5	36	27.2	14
Ø10	Ø12	C-KQ2T10-12	20.9	28.5	6.8	22	21	56	44.5	21
Ø12	Ø16	C-KQ2T12-16	26.5	34	10	25	22	108.5	(92.2)	88
Ø6	Ø4	C-KQ2T06-04	120.8	20	5.3	16	17	6.4	4.4	10
Ø8	Ø6	C-KQ2T08-06	15.2	23	6	17	18.5	13.4	10.6	15
Ø10	Ø8	C-KQ2T10-08	18.5	26.5	7.5	18.5	21	25.6	17.7	25
Ø12	Ø10	C-KQ2T12-10	20.9	28.5	7.5	21	22	40	28.4	29
Ø16	Ø12	C-KQ2T16-12	26.5	34	10	22	25	57.4	45.4	90

C-KQ2TW 十字四通接管

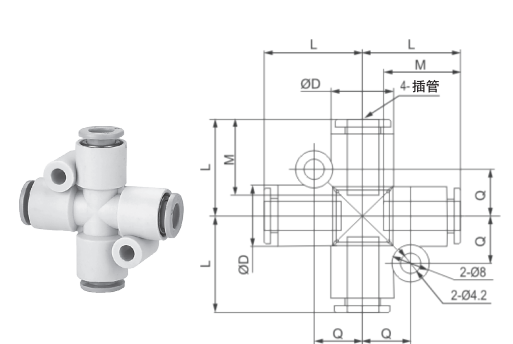

插管 (mm)	型号	ØD	L	Q	M	有效面积 (mm²)		重量 (g)
						尼龙	聚氨酯	
Ø4	C-KQ2TW04-00	10.4	18	8.7	16	6.4	4.4	9
Ø6	C-KQ2TW06-00	12.8	20	9.9	17	13.4	10.6	13
Ø8	C-KQ2TW08-00	15.2	23	11.1	18.5	25.6	17.7	20
Ø10	C-KQ2TW10-00	18.5	26.5	12.8	21	40	28.4	33
Ø12	C-KQ2TW12-00	20.9	28.5	13.9	22	57.4	45.4	39


C-KQ2TX 双变径十字四通接管

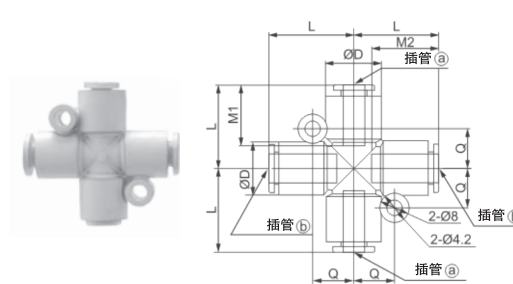

插管 (mm)		型号	ØD	L	Q	M1	M2	有效面积 (mm²)		重量 (g)
①	②							尼龙	聚氨酯	
Ø6	Ø8	C-KQ2TX06-08	15.2	23	11.1	18.5	17	13.4	10.6	13
Ø8	Ø10	C-KQ2TX08-10	18.5	26.5	12.8	21	18.5	25.6	17.7	27
Ø10	Ø12	C-KQ2TX10-12	20.9	28.5	13.9	22	21	40	28.4	36


C-KQ系列 快速接头

C-KQZTY 三变径十字四通接管

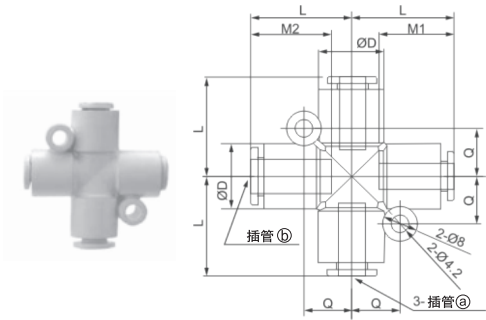


插管 (mm)		型号	ØD	L	Q	M1	M2	有效面积 (mm²)		重量 (g)
③	⑥							尼龙	聚氨酯	
Ø6	Ø8	C-KQ2TY06-08	15.2	23	11.1	17	18.5	13.4	10.6	15
Ø8	Ø10	C-KQ2TY08-10	18.5	26.5	12.8	18.5	21	25.6	17.7	23
Ø10	Ø12	C-KQ2TY10-12	20.9	28.5	13.9	21	22	40	28.4	35

C-KQZY 外螺Y型接头

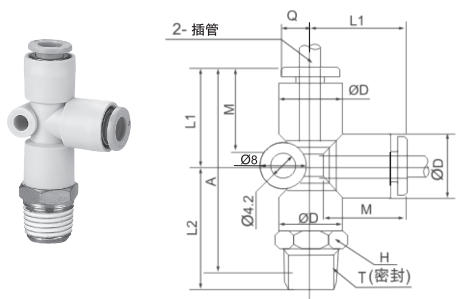

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD	Q	L1	L2	A	M	有效面积 (mm²)		重量 (g)
										尼龙	聚氨酯	
Ø04	C-KQ2Y 04-01S	R1/8	14	10.5	4.6	18.1	22.1	36.1	16.1	6.4	4.4	13
	C-KQ2Y 04-02S	R1/4					26.1	38.1				19
Ø06	C-KQ2Y 06-01S	R1/8	14	12.9	5.4	20.1	23.1	39.1	17.1	13.4	10.6	12
	C-KQ2Y 06-02S	R1/4					27.1	41.1				20
	C-KQ2Y 06-03S	R3/8					29.1	42.6				34
Ø08	C-KQ2Y 08-01S	R1/8	17	15.3	6.1	23.1	24.6	43.6	18.6	25.6	12.7	14
	C-KQ2Y 08-02S	R1/4					28.6	45.6				22
	C-KQ2Y 08-03S	R3/8					30.6	47.2				36
Ø10	C-KQ2Y 10-01S	R1/8	19	18.6	6.9	26.6	27.1	49.7	21	40	28.4	31
	C-KQ2Y 10-02S	R1/4					30.1	50.7				29
	C-KQ2Y 10-03S	R3/8					32.1	52.1				39
	C-KQ2Y 10-04S	R1/2					36.1	54.6				66
Ø12	C-KQ2Y 12-02S	R1/4	22	21	7.6	28.6	31.1	53.6	22.1	57.4	45.4	31
	C-KQ2Y 12-03S	R3/8					33.1	55.2				41
	C-KQ2Y 12-04S	R1/2					37.1	57.6				68


C-KQ2U 外螺U型接头

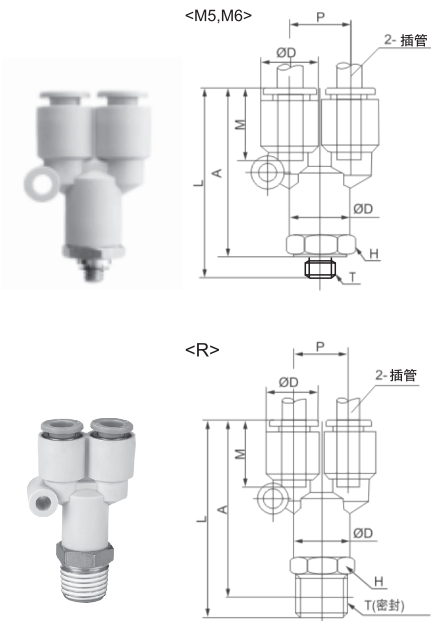

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD	L	P	A	M	有效面积 (mm²)		重量 (g)
									尼龙	聚氨酯	
Ø4	C-KQ2U04-01S	1/8	11	10.4	42	10.4	38	16	4.2	4.2	11
	C-KQ2U04-02S	1/4	14		46		40				20
Ø6	C-KQ2U06-01S	1/8	13	12.8	45.5	12.8	41.5	17	13.4	10.6	11
	C-KQ2U06-02S	1/4	14		49		43				21
	C-KQ2U06-03S	3/8	17		51		44.5				34
Ø8	C-KQ2U08-01S	1/8	17	15.2	52.5	15.2	48.5	18.5	25.6	17.7	15
	C-KQ2U08-02S	1/4			55.5		49.5				23
	C-KQ2U08-03S	3/8			56.5		50				35
Ø10	C-KQ2U10-02S	1/4	19	18.5	61	18.5	55	21	40	28.4	30
	C-KQ2U10-03S	3/8			62		55.5				40
	C-KQ2U10-04S	1/2			65		57				65
Ø12	C-KQ2U12-02S	1/4	22	20.9	64.5	20.9	58.5	22	57.4	45.4	32
	C-KQ2U12-03S	3/8			65.5		59				40
	C-KQ2U12-04S	1/2			68.5		60.5				65
Ø16	C-KQ2U16-03S	3/8	27	26.5	76	26.5	69.5	25	81	(81)	106
	C-KQ2U16-04S	1/2			79		71				111


快速接头 C-KQ系列

C-KQ2UD变径五通接管

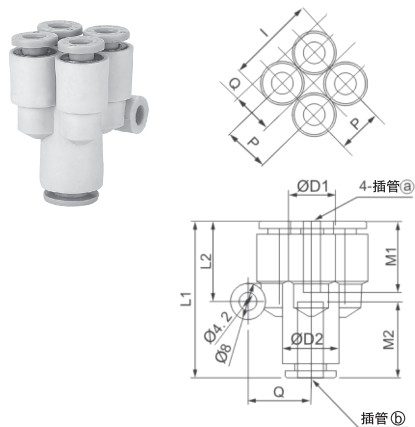


插管 (mm)		型号	ØD1	ØD2	L1	L2	P	I	Q	M1	M2	有效面积 (mm²)		重量 (g)
a	b											尼龙	聚氨酯	
Ø4	Ø6	C-KQ2UD04-06	10.4	12.8	35.5	18.2	10.4	21	9.7	16	17	4.2	4.2	10
Ø6	Ø8	C-KQ2UD06-08	12.8	15.2	40.5	20.3	12.8	26	11.7	17	18.5	13.4	10.6	17

C-KQ2UD 外螺Y型五通接头

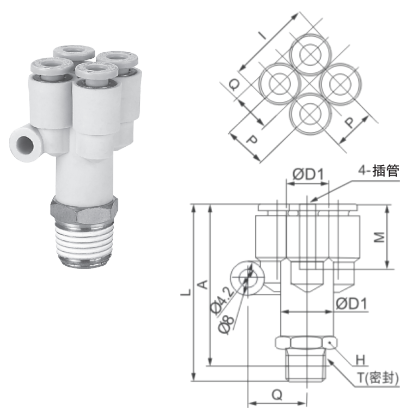

插管 (mm)	型号	连接螺纹 T	H 六角对边	ØD1	ØD2	L	I	A	Q	M	P	有效面积 (mm²)		重量 (g)
												尼龙	聚氨酯	
Ø4	C-KQ2UD04-01S	1/8	13	10.4	12.8	43.5	21	39.5	9.7	16	10.4	4.2	4.2	17
	C-KQ2UD04-02S	1/4	14			47		41						25
Ø6	C-KQ2UD06-01S	1/8	17	12.8	15.2	50.5	26	46.5	11.7	17	12.8	13.4	10.6	29
	C-KQ2UD06-02S	1/4				53.5		47.5						


C-KQ2U U型接管

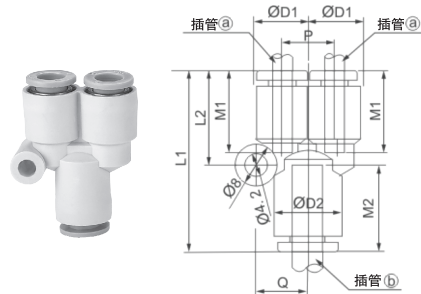

插管 (mm)		型号	ØD	L1	L2	P	Q	M		有效面积 (mm²)		重量 (g)
a	b							1	2	尼龙	聚氨酯	
Ø4	Ø4	C-KQ2U04-00	10.4	34	18	10.4	9.7	16		4.2	4.2	7
Ø6	Ø6	C-KQ2U06-00	12.8	34	20	12.8	11.7	17		13.4	10.6	9
Ø8	Ø8	C-KQ2U08-00	15.2	42.5	24.5	15.2	13.7	18.5		25.6	17.7	11
Ø10	Ø10	C-KQ2U10-00	18.5	48	27.5	18.5	16.1	21		40	28.4	16
Ø12	Ø12	C-KQ2U12-00	20.9	51	30	20.9	18.1	22		57.4	45.4	23
Ø16	Ø16	C-KQ2U16-00	26.5	61.5	36.5	26.5	23	25		113	(96)	54
Ø4	Ø6	C-KQ2U04-06	12.8	35	18	10.4	9.7	16	17	4.2	4.2	6
Ø6	Ø8	C-KQ2U06-08	15.2	39.5	20	12.8	11.7	17	18.5	13.4	10.6	11
Ø8	Ø10	C-KQ2U08-10	18.5	45	24.5	15.2	13.7	18.5	21	25.6	17.1	18
Ø10	Ø12	C-KQ2U10-12	20.9	49	27.5	18.5	16.1	21	22	40	28.4	27
Ø12	Ø16	C-KQ2U12-16	26.5	66.5	41.5	26.5	23	22	25	57.4	45.4	100
Ø6	Ø4	C-KQ2U06-04	12.8	35	18	10.4	9.7	17	16	4.2	4.2	6
Ø8	Ø6	C-KQ2U08-06	15.2	39.5	20	12.8	11.7	18.5	17	13.4	10.6	11
Ø10	Ø8	C-KQ2U10-08	18.5	45	24.5	15.2	13.7	21	18.5	25.6	17.1	18
Ø12	Ø10	C-KQ2U12-10	20.9	49	27.5	18.5	16.1	22	21	40	28.4	27
Ø16	Ø12	C-KQ2U16-12	26.5	66.5	41.5	26.5	23	25	22	57.4	45.4	100


C-KQ系列 快速接头

C-KQ2U U型插接管

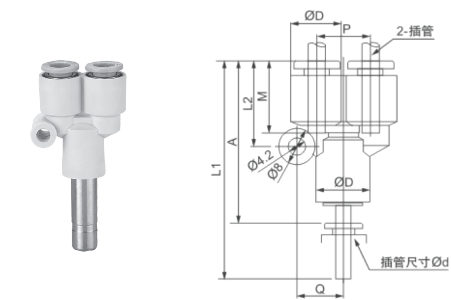


插管 (mm)	插管 ØD	型号	ØD	L1	L2	P	Q	A	M	有效面积 (mm²)		重量 (g)
										尼龙	聚氨酯	
Ø4	Ø4	C-KQ2U04-99	10.4	51.5	18	10.4	9.7	35.5	16	4.2	4.2	22
Ø6	Ø6	C-KQ2U06-99	12.8	55.5	20	12.8	11.7	38.5	17	13.4	10.6	28
Ø8	Ø8	C-KQ2U08-99	15.2	64.5	24.5	15.2	13.7	46	18.5	25.6	17.7	21
Ø10	Ø10	C-KQ2U10-99	18.5	71.5	27.5	18.5	16.1	50.5	21	40	28.4	36
Ø12	Ø12	C-KQ2U12-99	20.9	75.5	30	20.9	18.1	53.5	22	57.4	45.4	32
Ø16	Ø16	C-KQ2U16-99	26.5	90	36.5	26.5	23	65	25	113	(96)	88

C-KQ2XD Y型五通插接管

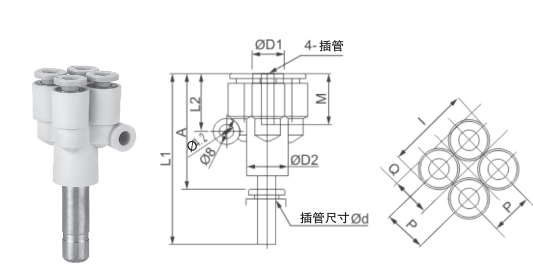


插管 (mm)	插管尺寸 ØD	型号	ØD1	ØD2	L1	L2	I	Q	A	P	M	有效面积 (mm²)		重量 (g)
												尼龙	聚氨酯	
Ø4	Ø6	C-KQ2XD04-06	10.4	12.8	54	18.2	21	9.7	37	10.4	16	4.2	4.2	10
Ø6	Ø8	C-KQ2XD06-08	12.8	15.2	62.5	20.3	26	11.7	44	12.8	17	13.4	10.6	23

C-KQ2X 变径U型插接管

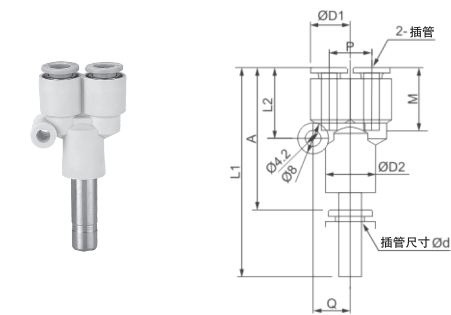


插管 (mm)	插管尺寸 ØD	型号	ØD1	ØD2	L1	L2	A	P	Q	M	有效面积 (mm²)		重量 (g)
											尼龙	聚氨酯	
Ø4	Ø6	C-KQ2X04-06	10.4	12.8	53.5	18.5	36.5	10.4	9.7	16	4.2	4.2	17
Ø6	Ø8	C-KQ2X06-08	12.8	15.2	61.5	20.5	43	12.8	11.7	17	13.4	10.6	28
Ø8	Ø10	C-KQ2X08-10	15.2	18.5	68.5	24.5	47.5	15.2	13.7	18.5	25.6	17.1	38
Ø10	Ø12	C-KQ2X10-12	18.5	20.9	73.5	27.5	51.5	18.5	16.1	21	40	28.4	52

C-KQ2N 变径连接插接管

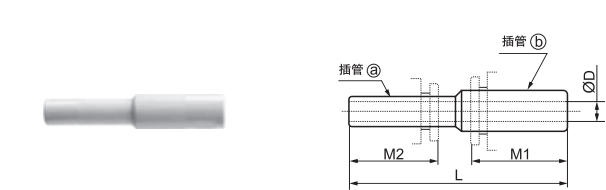

插管 (mm)		型号	L	M1	M2	ØD	重量 (g)
①	②						
Ø4	Ø6	C-KQ2N04-06	38	17	16	2.5	2
Ø6	Ø8	C-KQ2N06-08	42	18.5	17	4	2
Ø8	Ø10	C-KQ2N08-10	47	21	18.5	6	13.2
Ø10	Ø12	C-KQ2N10-12	51	22	21	8	18.2


C-KQ2C 单边接管

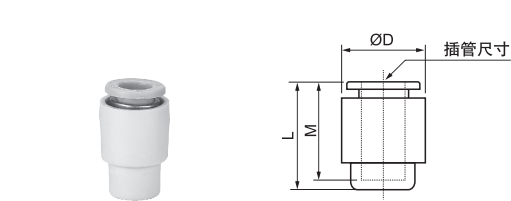

插管 (mm)	型号	ØD	L	M	重量 (g)
Ø4	C-KQ2C04-00	10.4	17	16	3
Ø6	C-KQ2C06-00	12.8	18.5	17	3
Ø8	C-KQ2C08-00	15.2	20.5	18.5	4
Ø10	C-KQ2C10-00	18.5	23	21	6
Ø12	C-KQ2C12-00	20.9	24	22	8


快速接头 C-KQ系列

C-KQ2P 堵插管

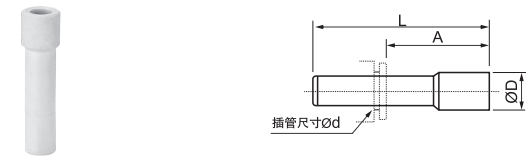


插管尺寸 ØD	型号	ØD	L	A	重量 (g)
Ø4	C-KQ2P-04	6	32	16	1
Ø6	C-KQ2P-06	8	35	18	1
Ø8	C-KQ2P-08	10	39	20.5	2
Ø10	C-KQ2P-10	12	43	22	3.5
Ø12	C-KQ2P-12	14	45.5	24	5

C-KQ2R 变径插接管

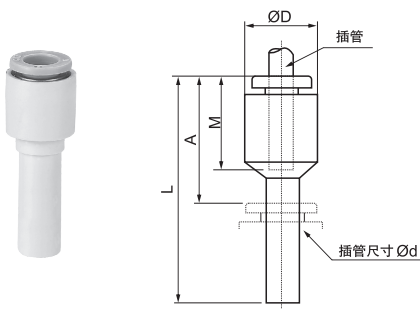


插管 (mm)	插管尺寸 ØD	型号	ØD	L	A	M	有效面积 (mm²)		重量 (g)
							尼龙	聚氨酯	
Ø4	Ø6	C-KQ2R04-06	10.4	34.5	17.5	15	5.6	4	1.8
	Ø8	C-KQ2R04-08		36.5	18				2.0
	Ø10	C-KQ2R04-10		39.5	18.5				3.3
Ø6	Ø4	C-KQ2R06-04	12.8	37	21	17	4	4	2.5
	Ø8	C-KQ2R06-08	12.8	37	18.5				2.5
	Ø10	C-KQ2R06-10		39.5	18.5				3
	Ø12	C-KQ2R06-12		42	20				4.7
Ø8	Ø10	C-KQ2R08-10	15.2	41	20	18.5	26.1	18.0	4.0
	Ø12	C-KQ2R08-12		42					4.6
Ø10	Ø12	C-KQ2R10-12	18.5	44.5	23	21	41.5	32.8	33

C-KQ2E 隔板接管

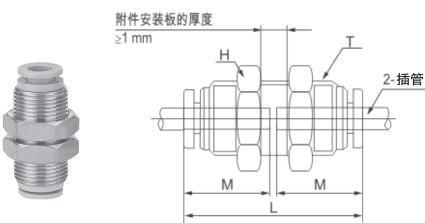

插管 (mm)	型号	连接螺纹 T	H 六角对边	L	安装孔	M	有效面积 (mm²)		重量 (g)
							尼龙	聚氨酯	
Φ4	C-KQ2E04-00	M12×1	14	32.5	13	16	5.6	4	26
Φ6	C-KQ2E06-00	M14×1	17	34.5	15	17	13.1	10.4	33
Φ8	C-KQ2E08-00	M16×1	19	38	17	18.5	26.1	18.0	52
Φ10	C-KQ2E10-00	M20×1	24	42.5	21	21	41.5	29.5	70
Φ12	C-KQ2E12-00	M22×1	27	44	23	22	58.3	46.1	90
Φ16	C-KQ2E16-00	M28×1.5	32	51	29	28	113	(96)	115

C-KQ2LE 隔板弯接管

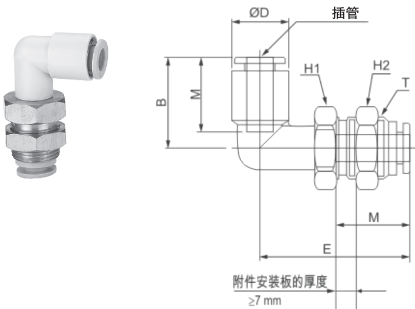

插管 (mm)	型号	连接螺纹 T	H1 六角对边	H2 六角对边	B	E	ØD	安装孔	M	有效面积 (mm²)		重量 (g)
										尼龙	聚氨酯	
Ø4	C-KQ2LE04-00	M12×1	14	14	18.5	31	10.4	13	16	4.2	4.2	18
Ø6	C-KQ2LE06-00	M14×1	17	17	20.5	34	12.8	15	17	11.4	9.0	25
Ø8	C-KQ2LE08-00	M16×1	17	19	23.5	38.5	15.2	17	18.5	21.6	14.9	33
Ø10	C-KQ2LE10-00	M20×1	22	24	26.5	43.5	18.5	21	21	35.2	25.0	63
Ø12	C-KQ2LE12-00	M22×1	24	27	28.5	45.5	20.9	23	22	50.2	39.7	77