




型号规格

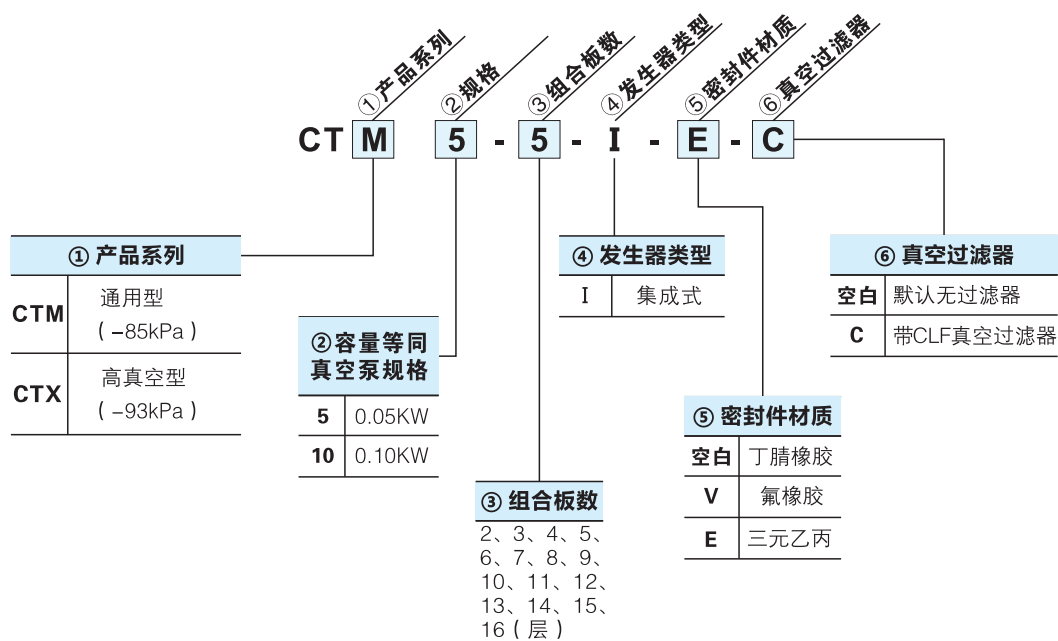

性能参数

不同真空度 (-kPa) 的真空流量 (L/min)

型号	规格	供气压力 bar	空气耗气量 L/min	0	10	20	30	40	50	60	70	80	90	最大真空度 -kPa
CTM	05x1	4.5	12	25	15	12.5	11	10	7.5	5.5	2	0.6	-	85
	10x1	4.5	28	32	28	24	22	18	15	11	5	1.35	-	85
CTX	05x1	4.5	18	23	14	10	9	7.5	6	4	2.8	1.5	0.44	92
	10x1	4.5	31	32	21	18	16	14	11	9.5	5.5	2.5	1.1	92

不同真空度 (-kPa) 的抽气时间 (s/L)

型号	规格	供气压力 bar	空气耗气量 L/min	10	20	30	40	50	60	70	80	90	最大真空度 -kPa
CTM	05x1	4.5	12	0.2	0.59	1.1	1.58	2.4	3.52	5.3	10.3	-	85
	10x1	4.5	28	0.12	0.28	0.6	0.81	1.18	1.82	2.65	5.21	-	85
CTX	05x1	4.5	18	0.21	0.81	1.52	2.35	3.48	4.85	6.57	10.5	19.3	92
	10x1	4.5	31	0.14	0.4	0.78	1.22	1.77	2.4	3.3	4.95	9.62	92

CTM/CTX I系列 集成式真空发生器

性能参数

型号	规格	供气压力 MPa	最大真空度 -kPa	最大真空流量 L/min	空气耗气量 L/min	噪音 dB(A)	单重 g	推荐软管直径 mm		
								进气口P	真空口V	排气口E
CTM	05x2	0.45-0.6	85	25x2	29-41	55-60	67	6	6	3/8x1
	05x3			25x3	44-64	55-60	80	6		3/8x1
	05x4			25x4	61-85	55-60	247	8		3/8x1
	05x5			25x5	71-104	60-65	255	8		3/8x1
	05x6			25x6	89-125	60-65	281	8		3/8x1
	05x7			25x7	104-145	60-65	299	8		3/8x1
	05x8			25x8	120-168	60-65	317	10		3/8x1
	05x9			25x9	132-190	60-65	335	10		3/8x1
	05x10			25x10	148-211	60-65	353	10		3/8x1
	05x11			25x11	165-232	60-65	371	10		3/8x1
	05x12			25x12	180-252	60-65	389	10		3/8x2
	05x13			25x13	195-275	60-65	417	10		3/8x2
	05x14			25x14	208-293	60-65	435	10		3/8x2
	05x15			25x15	225-316	60-65	453	12		3/8x2
	05x16			25x16	241-335	60-65	471	12		3/8x2
CTM	10x2	0.45-0.6	85	32x2	61-85	55-60	67	8	6	3/8x1
	10x3			32x3	91-125	60-65	80	8		3/8x1
	10x4			32x4	121-167	60-65	247	10		3/8x1
	10x5			32x5	151-212	60-65	255	10		3/8x1
	10x6			32x6	185-255	60-65	281	10		3/8x2
	10x7			32x7	211-295	60-65	299	10		3/8x2
	10x8			32x8	241-335	60-65	327	10		3/8x2
	10x9			32x9	271-376	60-65	345	12		3/8x2
	10x10			32x10	301-421	60-65	363	12		3/8x2
	10x11			23x11	332-463	60-63	381	12		3/8x2
	10x12			23x12	361-505	60-63	399	12		3/8x2
CTX	05x2	0.45-0.6	93	23x2	43-49	55-60	67	6	6	3/8x1
	05x3			23x3	65-73	55-60	80	6		3/8x1
	05x4			23x4	85-96	60-63	247	8		3/8x1
	05x5			23x5	106-121	60-63	255	8		3/8x1
	05x6			23x6	130-144	60-63	281	8		3/8x1
	05x7			23x7	151-167	60-63	299	8		3/8x1
	05x8			23x8	173-193	60-63	317	10		3/8x1
	05x9			23x9	195-217	60-63	335	10		3/8x1
	05x10			23x10	215-241	60-63	353	10		3/8x1
	05x11			23x11	238-265	60-63	371	10		3/8x1
	05x12			23x12	260-289	60-63	389	10		3/8x2
	05x13			32x13	281-313	60-63	417	10		3/8x2
	05x14			32x14	346-335	63-65	435	10		3/8x2
	05x15			32x15	389-361	63-65	453	10		3/8x2
	05x16			32x16	346-385	63-65	471	10		3/8x2


注：此系列产品工作温度为-20~80℃，最大供气压力7bar。

集成式真空发生器 CTM/CTX I 系列

性能参数

型号	规格	供气压力 MPa	最大真空度 -kPa	最大真空流量 L/min	空气耗气量 L/min	噪音 dB(A)	单重 g	推荐软管直径 mm		
								进气口P	真空口V	排气口E
CTX	10x2	0.45-0.6	93	32x2	87-96	60-63	67	6	6	3/8x1
	10x3			32x3	130-145	63-65	80	6		3/8x1
	10x4			32x4	173-193	63-65	247	8		3/8x1
	10x5			32x5	215-241	63-65	255	8		3/8x1
	10x6			32x6	260-288	63-65	281	10		3/8x2
	10x7			32x7	303-337	63-65	299	10		3/8x2
	10x8			32x8	346-385	63-65	327	10		3/8x2
	10x9			32x9	389-433	63-65	345	12		3/8x2
	10x10			32x10	433-481	63-65	363	12		3/8x2
	10x11			32x11	476-529	63-65	381	12		3/8x2
	10x12			32x12	519-578	63-65	399	12		3/8x2


尺寸规格(mm)

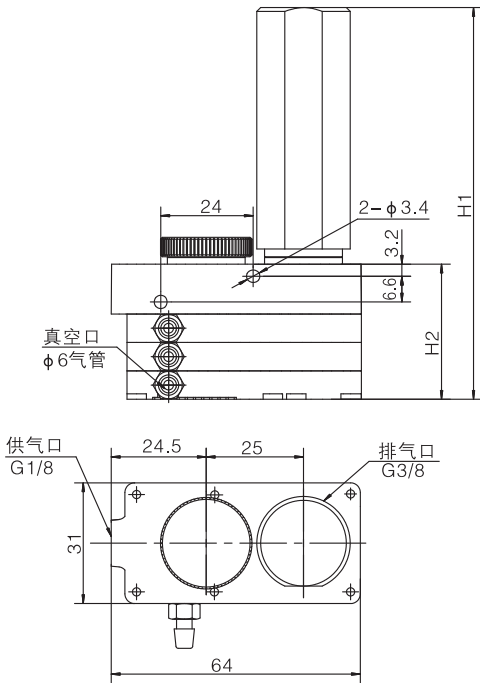

型号	规格	H1	H2	供气口规格	真空口规格	排气规格
CTM CTX	5(10)x2	91.5	27.5	G1/8F	M5+Φ6	外置消声器
	5(10)x3	99	35	G1/8F	M5+Φ6	外置消声器

CTM/CTX I系列 集成式真空发生器

尺寸规格(mm)

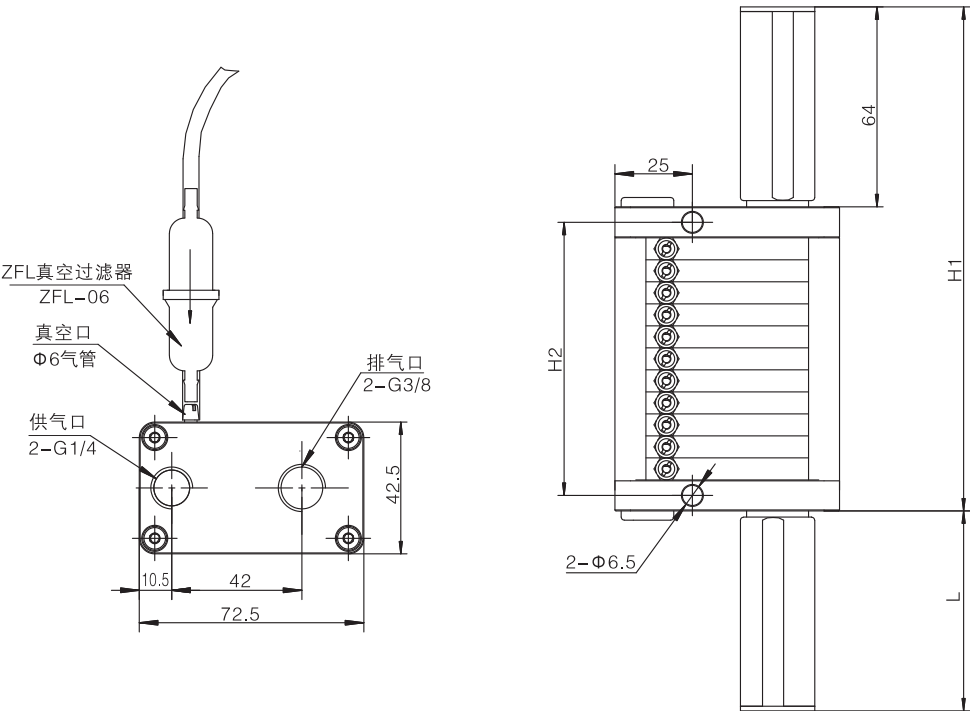

型号	组合板数	5			10			供气口 规格	真空口 规格	排气 规格
		H1	H2	L	H1	H2	L			
CTM CTX	4	113	39	-	113	39	-	G1/4F	M5+Φ6 气管接头	外置消声器
	5	121	47	-	121	47	-			
	6	128	54	-	128	54	64			
	7	135	61	-	135	61	64			
	8	142	68	-	142	68	64			
	9	150	76	-	150	76	64			
	10	157	83	-	157	83	64			
	11	164	90	-	164	90	64			
	12	172	98	64	172	98	64			
	13	179	105	64	-	-	-			
	14	186	112	64	-	-	-			
	15	194	120	64	-	-	-			
	16	201	127	64	-	-	-			