

直角型/万向型调速阀

C-AS系列



规格

气体的流体	空气
耐压	1.5 MPa
最大使用压力	1 MPa
最小使用压力	0.1 MPa
环境及流体温度	-5 - 60°C (但未结冰)
圈数	10 (M3、M5为8圈8)
适用管子材料	尼龙, 聚氨酯管

流量特性

C-AS ① ② ③ ④ - ⑤ - ⑥ ⑦ ⑧

① 阀体大小
1 M3, M5
2 1/8, 1/4
3 3/8
4 1/2

② 类型
2 直角弯头型
3 万向转动型

③ 控制类型
0 排气节流型 (螺纹进气)
1 进气节流型 (插管进气)

④ 带快速接头

⑤ 螺纹大小
M3 M3×0.5
M5 M6×0.8
01 1/8
02 1/4
03 3/8
04 1/2

⑥ 插管
23 Ø3.2
04 Ø4
06 Ø6
08 Ø8
10 Ø10
12 Ø12


⑦ 带密封胶
空白 无
S 带密封胶

⑧ 用螺丝刀调节
空白 无
一字螺丝刀
专用螺丝刀


D 一字螺丝刀
T 专用螺丝刀

流量特性


C-AS1201F-M3/M5, C-AS1211F-M3/M5
C-AS1301F-M3/M5, C-AS1311F-M3/M5

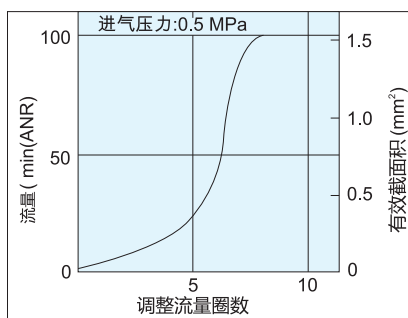


C-AS2201F-01, C-AS2211F-01
C-AS2301F-01, C-AS2311F-01

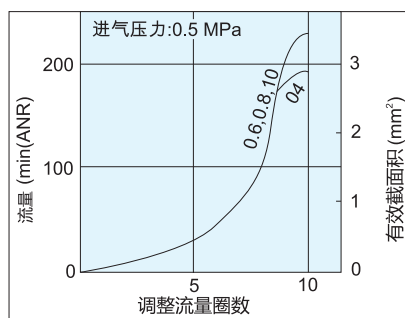


C-AS2201F-02, C-AS2211F-02
C-AS2301F-02, C-AS2311F-02

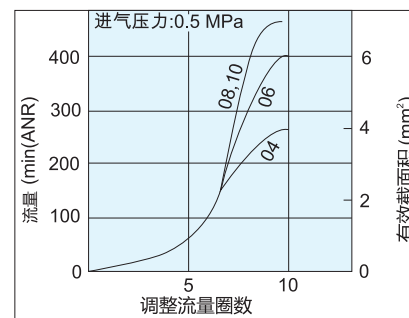

C-AS3201F, C-AS3211F
C-AS3301F, C-AS3311F

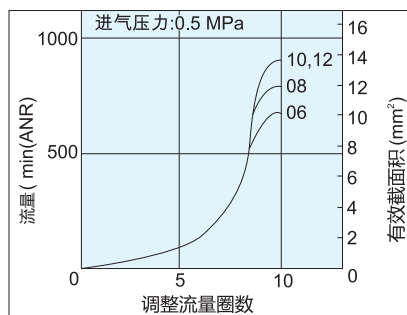


C-AS4201F, C-AS4211F
C-AS4301F, C-AS4311F

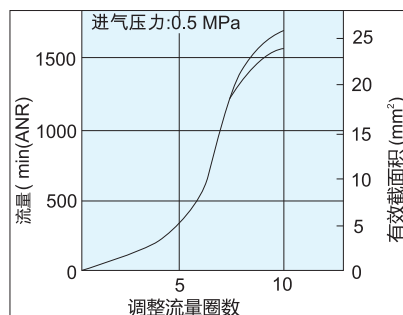


直角型/万向型调速阀 C-AS系列

直角弯头型

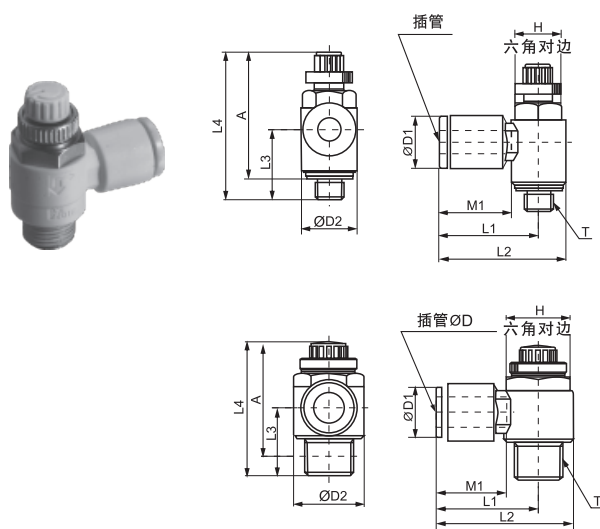

ØD	型号	T	H	D1	D2	L1	L2	L3	L4		A		M1	
Ø4	C-AS12□1F-M3-04	M30.5	5.5	9.3	9.6	17.3	22.1	12	26.6	24.1	24	21.5	12.7	6
Ø4	C-AS12□1F-M5-04	M50.8	8	9.3	9.6	17.3	22.1	12.3	28.6	25.8	25	22.2	12.7	7
Ø6	C-AS12□1F-M5-06	M50.8		11.6		18.1	22.9	11.7					13.5	
Ø4	C-AS22□1F-01-04S	1/8	12 (12.7)	9.3	14.2	20.4	27.5	14.3	36.1	31.1	32.1	27.1	12.7	17
Ø6	C-AS22□1F-01-06S			11.6		20.4	27.5						13.5	
Ø8	C-AS22□1F-01-08S			15.2		25.3	32.4						18.5	
Ø10	C-AS22□1F-01-10S	1/4	17 (17.5)	18.5	18.5	33.1	40.2	15	40.4	35.4	34.4	29.4	21	21
Ø4	C-AS22□1F-02-04S			10.4		25.2	34.4						16	
Ø6	C-AS22□1F-02-06S			12.8		25.2	34.4						17	
Ø8	C-AS22□1F-02-08S	3/8	19	15.2	23	27.2	36.4	20	46.5	41.5	40.2	35.2	18.5	34
Ø10	C-AS22□1F-02-10S			18.5		33.9	43.2						21	
Ø6	C-AS32□1F-02-06S			12.8		27.8	39.3	21.8	48.8	43.8	42.8	37.8	17	60
Ø8	C-AS32□1F-02-08S	1/2	24 (23.8)	15.2		29.5	41						18.5	
Ø10	C-AS32□1F-02-10S			18.5		31.8	43.3						21	
Ø12	C-AS32□1F-02-12S	3/4	29	20.9		32.8	44.3	20.9	46.5	41.5	40.2	35.2	22	61
Ø6	C-AS32□1F-03-06S			12.8		27.8	39.3						17	
Ø8	C-AS32□1F-03-08S			15.2		29.5	41						18.5	
Ø10	C-AS32□1F-03-10S	1	34	18.5	23	31.8	43.3	20.9	46.5	41.5	40.2	35.2	21	59
Ø12	C-AS32□1F-03-12S			20.9		32.8	44.3						22	
Ø10	C-AS42□1F-04-10S	1 1/2	42	18.5	28.6	33.6	47.9	25.4	57.6	50.1	49.6	42.1	21	100
Ø12	C-AS42□1F-04-12S			20.9		34.6	48.9						22	


直角弯头螺丝刀调节型

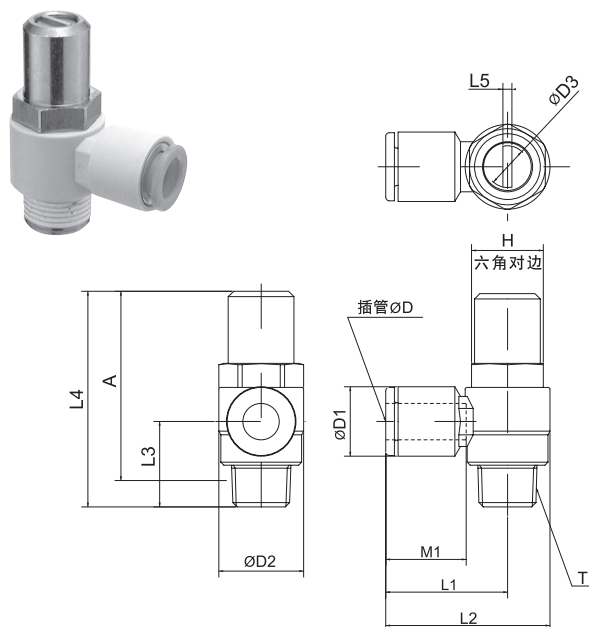

ØD	型号	T	H	D1	D2	D3	L1	L2	L3	L4	L5	A	M1
Ø3.2	AS12□1F-M5-23O	M5 x 0.8	8	8.4	9.6	4.7	17.3	22.1	12.3	31	0.7	27.4	12.7
Ø4	AS12□1F-M5-04O			9.3			18.1	22.9	11.7				13.5
Ø6	AS12□1F-M5-06O			11.6			20.4	27.5	14.3				12.7
Ø4	AS22□1F-01-04SO	R 1/8	12	9.3	14.2	7.2	20.4	27.5	14.3	35.6	1.2	31.6	13.5
Ø6	AS22□1F-01-06SO			11.6			25.3	32.4					18.5
Ø8	AS22□1F-01-08SO			15.2			33.1	40.2					21
Ø10	AS22□1F-01-10SO	R 1/4	17	18.5	18.5	7.2	33.1	40.2	15	40.7	1.2	34.7	16
Ø4	AS22□1F-02-04SO			10.4			25.2	34.4					17
Ø6	AS22□1F-02-06SO			12.8			27.2	36.4					18.5
Ø8	AS22□1F-02-08SO	R 1/2	19	15.2	23	9.8	33.9	43.2	20	55.3	1.2	49.3	21
Ø10	AS22□1F-02-10SO			18.5			33.9	43.2					22
Ø6	AS32□1F-02-06SO			12.8			27.8	39.3	20.9	53.7	1.2	47.4	17
Ø8	AS32□1F-02-08SO	R 3/8	19	15.2			29.5	41					18.5
Ø10	AS32□1F-02-10SO			18.5			31.8	43.3					21
Ø12	AS32□1F-02-12SO	1	34	20.9			32.8	44.3	20.9	53.7	1.2	47.4	22
Ø6	AS32□1F-03-06SO			12.8			27.8	39.3					17
Ø8	AS32□1F-03-08SO			15.2			29.5	41					18.5
Ø10	AS32□1F-03-10SO	1 1/2	42	18.5	28.6	12.4	31.8	43.3	25.4	63.8	1.2	55.8	21
Ø12	AS32□1F-03-12SO			20.9			32.8	44.3					22
Ø10	AS42□1F-04-10SO	1 1/2	42	18.5			33.6	47.9					21
Ø12	AS42□1F-04-12SO			20.9			34.6	48.9					22


C-AS系列 直角型/万向型调速阀

万向转动型

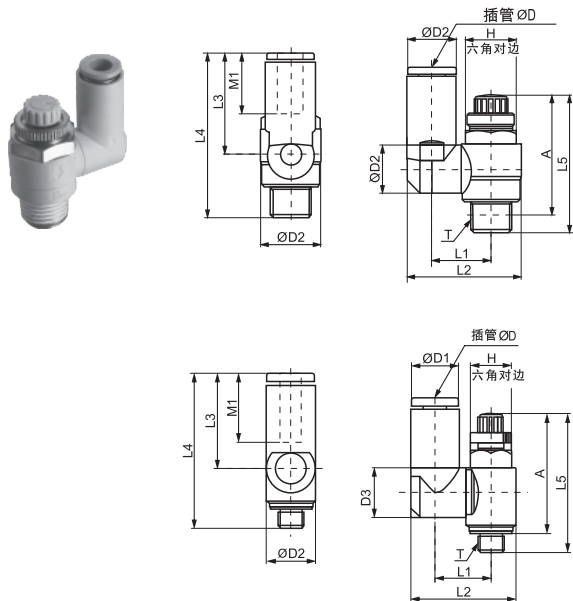

Ød	型号	T	H	D1	D2	D3	L1	L2	L3	L4	L5		A		M1		
											大	小	大	小			
Ø4	C-AS13□1F-M3-04	M30.5	5.5	9.3	7.2	7.2	10.1	18.3	17.9	28.6	26.6	24.1	24	21.5	12.7	5	
Ø4	C-AS13□1F-M5-04	M50.8	8	9.3	9.6	9.3	10.8	20.3	17.5	28.7	28.6	25.8	25	22.2	12.7	7	
Ø6	C-AS13□1F-M5-06	M50.8		11.6				21.4	20.6	31.8						13.5	
Ø4	C-AS23□1F-01-04S	1/8	12	9.3	14.2	9.3	13.1	24.9	17.5	31.8	36.1	31.1	32.1	27.1	12.7	18	
Ø6	C-AS23□1F-01-06S		11.6	10.9	14	26.9	22.9	37.2							13.5		
Ø8	C-AS23□1F-01-08S		15.2	12.9	16.2	30.9	28.2	41.7							18.5		21
Ø4	C-AS23□1F-02-04S		10.4	10.9	16.2	30.6	21.9	40.1							16		32
Ø6	C-AS23□1F-02-06S	1/4	17	12.8	18.5	12.9	18.4	34	25.2	42.6	40.4	35.4	34.4	29.4	17	33	
Ø8	C-AS23□1F-02-08S		15.2	12.9	18.3	35.2	28.2	45.6							18.5	36	
Ø10	C-AS23□1F-02-10S		18.5	20.2	38.7	31	48.4			21					40		
Ø6	C-AS33□1F-02-06S		12.8	12.9	20.6	38.5	25.2	47							17	60	
Ø8	C-AS33□1F-02-08S	3/8	15.2	23	12.9	23	39.7	28.2	50	48.8	43.8	42.8	37.8	18.5	63		
Ø10	C-AS33□1F-02-10S		18.5	16.2	23	43.7	32.6	54.4							21	67	
Ø12	C-AS33□1F-02-12S		20.9	20.6	44.9	34.4	56.2							22	69		
Ø6	C-AS33□1F-03-06S		12.8	12.9	20.6	38.5	25.2	46.1							17	56	
Ø8	C-AS33□1F-03-08S	1/2	15.2	23	12.9	23	39.7	28.2	49.1	46.5	41.5	40	35	18.5	59		
Ø10	C-AS33□1F-03-10S		18.5	16.2	23	43.7	32.6	53.5							21	63	
Ø12	C-AS33□1F-03-12S		20.9	20.9	23	44.9	34.4	55.3							22	65	
Ø10	C-AS43□1F-04-10S		24	18.5	28.6	16.2	25.8	49.4	32.6					58	57.6	50.1	49.6
Ø12	C-AS43□1F-04-12S	21.7	21.7	21.7	19.4	26.8	52	36.3	61.7					22	106		

万向转动螺丝刀调节型

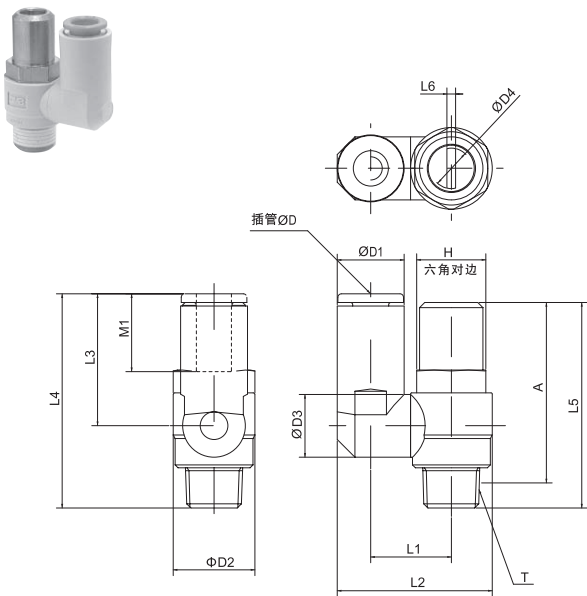

ØD	型号	T	H	D1	D2	D3	D4	L1	L2	L3	L4	L5	L6	A	M1	
Ø3.2	C-AS13□1F-M5-23O	M5 x 0.8	8	8.4	9.3	9.3	4.7	19.8	17.5	28.7	31	0.7	27.4	12.7		
Ø4	C-AS13□1F-M5-04O			20.3												
Ø6	C-AS13□1F-M5-06O			21.4				20.6							31.8	
Ø4	C-AS23□1F-01-04SO	R 1/8	12	9.3	14.2	9.3	7.2	13.1	24.9	17.5	31.8	35.6	1.2	31.6	12.7	
Ø6	C-AS23□1F-01-06SO			11.6				10.9	14	26.9	22.9				37.2	13.5
Ø8	C-AS23□1F-01-08SO			15.2				12.9	16.2	30.9	28.2				41.7	18.5
Ø4	C-AS23□1F-02-04SO	R 1/4	17	10.4	18.5	12.9	7.2	16.2	30.6	21.9	40.1	40.7	1.2	34.7	16	
Ø6	C-AS23□1F-02-06SO			12.8				18.4	34	25.2	42.6				17	
Ø8	C-AS23□1F-02-08SO			15.2				18.3	35.2	28.2	45.6				18.5	
Ø10	C-AS23□1F-02-10SO			18.5				20.2	38.7	31	48.4				21	
Ø6	C-AS33□1F-02-06SO	R 1/4	19	12.8	23	12.9	9.8	20.6	38.5	25.2	47	55.3	1.2	49.3	17	
Ø8	C-AS33□1F-02-08SO			15.2				39.7	28.2	50	18.5					
Ø10	C-AS33□1F-02-10SO			18.5				43.7	32.6	54.4	21					
Ø12	C-AS33□1F-02-12SO			20.9				44.9	34.4	56.2	22					
Ø6	C-AS33□1F-03-06SO	R 3/8	19	12.8	23	12.9	9.8	20.6	38.5	25.2	46.1	53.7	1.2	47.4	17	
Ø8	C-AS33□1F-03-08SO			15.2				39.7	28.2	49.1	18.5					
Ø10	C-AS33□1F-03-10SO			18.5				43.7	32.6	53.5	21					
Ø12	C-AS33□1F-03-12SO			20.9				44.9	34.4	55.3	22					
Ø10	C-AS43□1F-04-10SO	R 1/2	24	18.5	28.6	16.2	12.4	25.8	49.4	32.6	58	63.8	1.2	55.8	21	
Ø12	C-AS43□1F-04-12SO			20.9				19.4	26.8	52	36.3				61.7	22